

WAAS
CH **40033**
W08A

APP CRS
084°

Rwy Idg
TDZE **170**
Apt Elev **176**

RNAV (GPS) RWY 8


CAMILLA-MITCHELL COUNTY (CXU)

Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 513 feet; increase LNAV/VNAV DA to 623 feet; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:

Climb to 2400 direct CEVOR and hold.

AWOS-3T 118.675	JACKSONVILLE CENTER 125.75 363.075	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

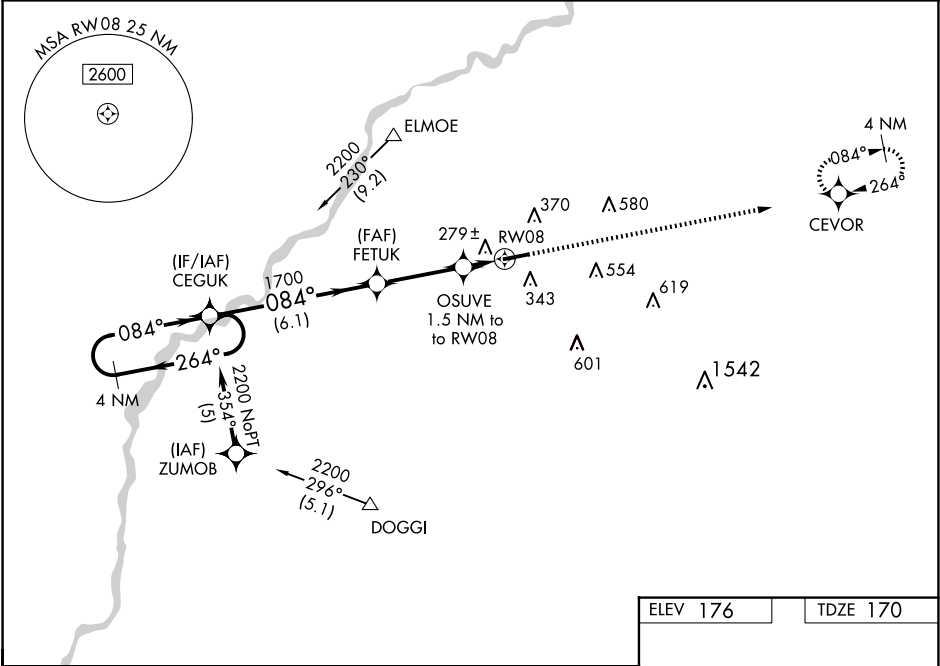

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

2400 CEVOR

GP 3.00° TCH 52

CEVOR

2200

264°

084°

FETUK

1700

OSUVE

1.5 NM to RWY 08

RWY 08

*680

6.1 NM

3.2 NM

1.5

084°

221±

5004 X 100

26

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		465-1	295 (300-1)	
LNAV/VNAV DA		575-1 $\frac{3}{8}$	405 (400-1 $\frac{3}{8}$)	
LNAV MDA		540-1	370 (400-1)	
CIRCLING	720-1 544 (600-1)	760-1 584 (600-1)	920-2 $\frac{1}{4}$ 744 (800-2 $\frac{1}{4}$)	940-2 $\frac{1}{2}$ 764 (800-2 $\frac{1}{2}$)

REIL Rwy 8 and 26 0
MIRL Rwy 8-26 0