

WAAS CH 61216 W20A	APP CRS 200°	Rwy Idg 6100 TDZE 3786 Apt Elev 3788
--	------------------------	---



RNAV (GPS) RWY 20
HEREFORD MUNI (HRX)

	RNP APCH - GPS.
--	-----------------


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use AMA altimeter setting: increase LPV DA to 4098 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4232 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cats C and D ½ SM, increase Circling visibility Cat C ½ SM and Cat D ¼ SM. Circling Baro to Rwy 14 and 32. Baro-VNAV and VDP NA when using AMA altimeter setting.

MISSED APPROACH:
Climb to 6000 direct
LEMGE and hold.

AWOS-3 118.05	AMARILLO APP CON ★ 119.5 307.0	UNICOM 122.8 (CTAF) 0
-------------------------	--	--

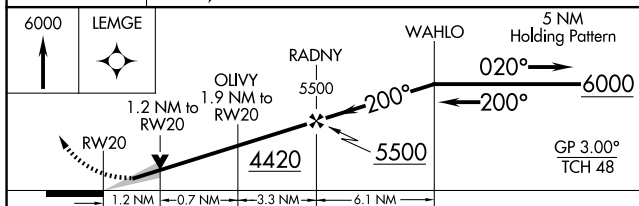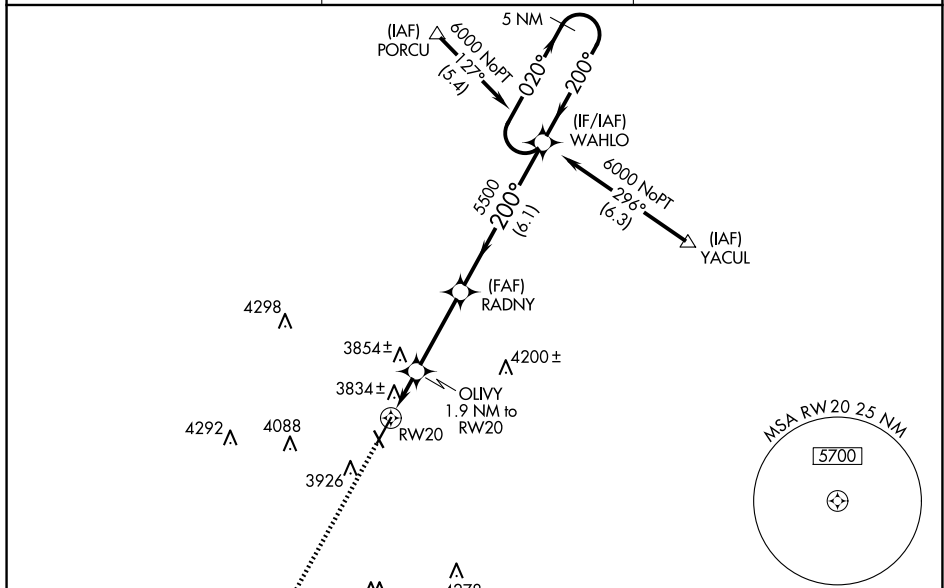

CATEGORY	A	B	C	D
LPV DA	3986- ³ / ₄ 200 (200- ³ / ₄)			
RNAV/DA	4120-1 ¹ / ₄ 334 (400-1 ¹ / ₄)			
RNAV MDA	4220-1	434 (500-1)	4220-1 ¹ / ₄	434 (500-1 ¹ / ₄)
CIRCLING	4280-1	492 (500-1)	4440-1 ¹ / ₄ 652 (700-1 ¹ / ₄)	4620-2 ³ / ₄ 832 (900-2 ³ / ₄)

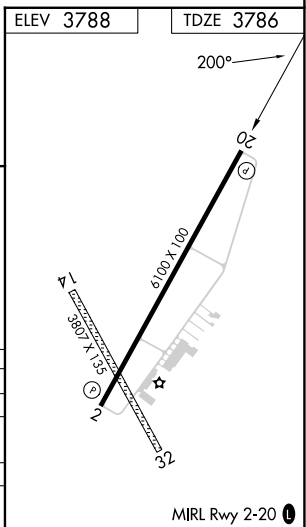

RNAV (GPS) RWY 20