

MILFORD, IOWA

AL-6455 (FAA)

23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev 1439	N/A N/A
--	------------------------	---	--------------------------


VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.

T	Circling NA to Rwy 18 and 36. Procedure NA at night.
A NA	Use Spencer altimeter setting, when not received, use Estherville altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 direct SPW VOR/DME and hold.

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

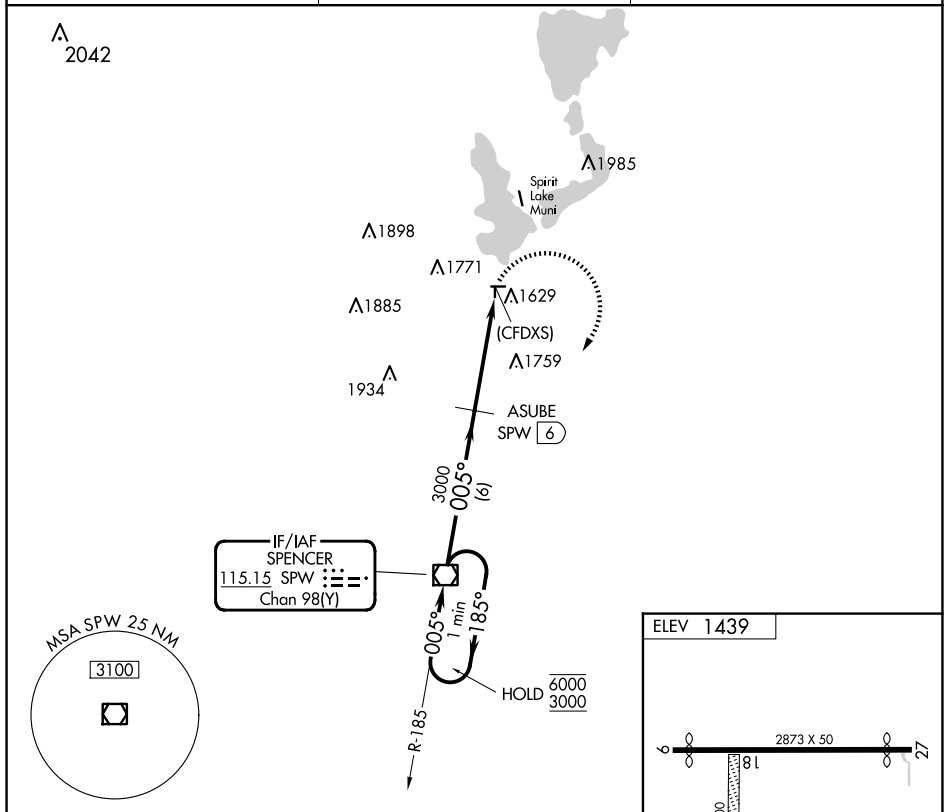

CATEGORY	A	B	C	D
C CIRCLING	2100-1 661 (700-1)		NA	
FAF to MAP 4.4 NM UTL Rwy 9-27 and 18-36				
Knots	60	90	120	150 180
Min:Sec	4:24	2:56	2:12	1:46 1:28

MILFORD, IOWA
Amdt 1 03JAN19

43°20'N-95°10'W

FULLER(4D8)
VOR-A

NC-3, 27 NOV 2025 to 25 DEC 2025