

WAAS CH 56429 W14A	APP CRS 135°	Rwy Idg TDZE 678 Apt Elev 678	5006 678
--	------------------------	---	---------------------------

RNAV (GPS) RWY 14

CHEROKEE COUNTY (J50)


▼

▲

Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase all DA to 1046 feet and increase LPV visibility ½ SM and LNAV/VNAV visibility ¼ SM; increase all MDA 120 feet and LNAV visibility Cat C ¾ SM, Circling visibility Cat C ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Nacogdoches altimeter setting.

MISSED APPROACH: Climb to 3100 direct NOPCI and hold.

AWOS-3 119.075	LONGVIEW APP CON* 128.75 379.15	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

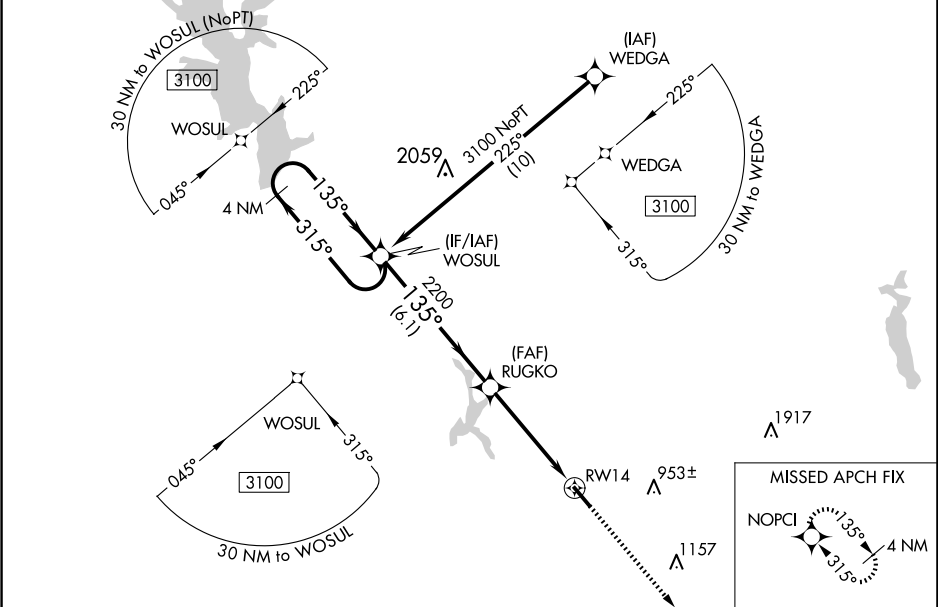

4 NM Holding Pattern WOSUL

3100 ← 315° / 135° →

GP 3.00° TCH 30

RUGKO 2200

*1.2 NM to RW14

RW14

6.1 NM / 3.5 NM / 1.2 NM

3100 ↑ / NOPCI

*LNAV only.

135° / 315°

5006 X 75

732

0.4% Up

ELEV 678 / TDZE 678

REIL Rwy 14 0

MIRL Rwy 14-32 0

CATEGORY	A	B	C	D
LPV DA	928-1	250 (300-1)		NA
LNAV/VNAV DA	928-1	250 (300-1)		NA
LNAV MDA	1080-1	402 (500-1)	1080-1 1/8 402 (500-1 1/8)	NA
CIRCLING	1080-1 402 (500-1)	1140-1 462 (500-1)	1280-1 3/4 602 (700-1 3/4)	NA