
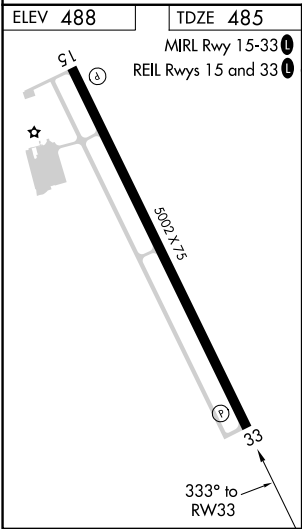


WAAS CH 45715 W33A	APP CRS 333°	Rwy Idg TDZE 485 Apt Elev 488
--	------------------------	---

RNAV (GPS) RWY 33

WASHINGTON RGNL (FYG)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.		MISSED APPROACH: Climb to 2700 direct EQAXO and hold.
AWOS-3PT 121.325	ST. LOUIS APP CON 126.5 254.3	UNICOM 122.8 (CTAF) 0

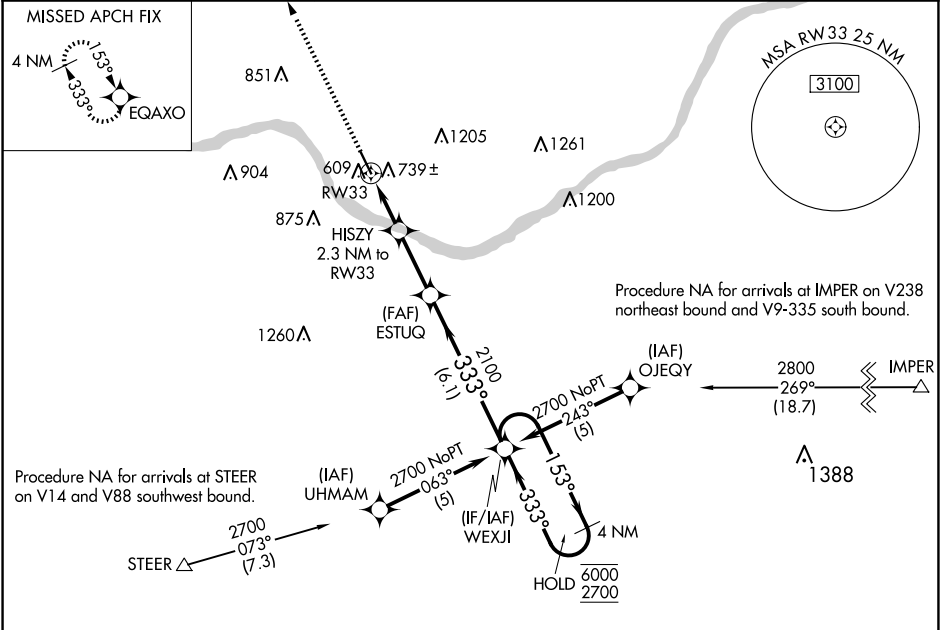

ELEV 488		TDZE 485	
MIRL Rwy 15-33		REIL Rws 15 and 33	
2700		EQAXO	
HISZY 2.3 NM to RW33		ESTUQ	
1.5 NM to RW33		WEXJI 4 NM Holding Pattern	
1260		2100	
1.5 NM		2.6 NM	
0.8		6.1 NM	
CATEGORY	A	B	C
LPV DA	823-1	338 (400-1)	NA
LNAV/VNAV DA	1050-1 5/8	565 (600-1 5/8)	NA
LNAV MDA	1000-1	515 (600-1)	1000-1 3/8 515 (600-1 3/8)
CIRCLING	1220-1 732 (800-1)	1260-1 772 (800-1)	1520-3 1032 (1100-3)