

WAAS CH 72807 W14A	APP CRS 147°	Rwy Idg TDZE 1142 Apt Elev 1145
--	------------------------	---

RNAV (GPS) RWY 14

NORTHWEST MISSOURI RGNL (EVU)



RNP APCH - GPS.

NA

Circling NA east of Rwy 14-32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use St. Joseph altimeter setting and increase LPV DA to 1517 feet, LNAV/VNAV DA to 1682 feet and all visibilities ½ SM. Increase all MDAs 140 feet, and LNAV visibility Cat C ¾ SM. Baro-VNAV and VDP NA when using St. Joseph altimeter setting.

MISSED APPROACH: Climb to 6000 direct BARND and hold, continue climb-in-hold to 6000.

AWOS-3PT 118.225	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

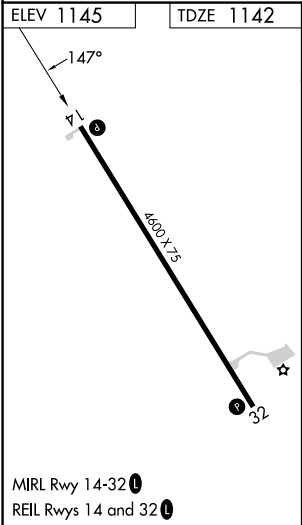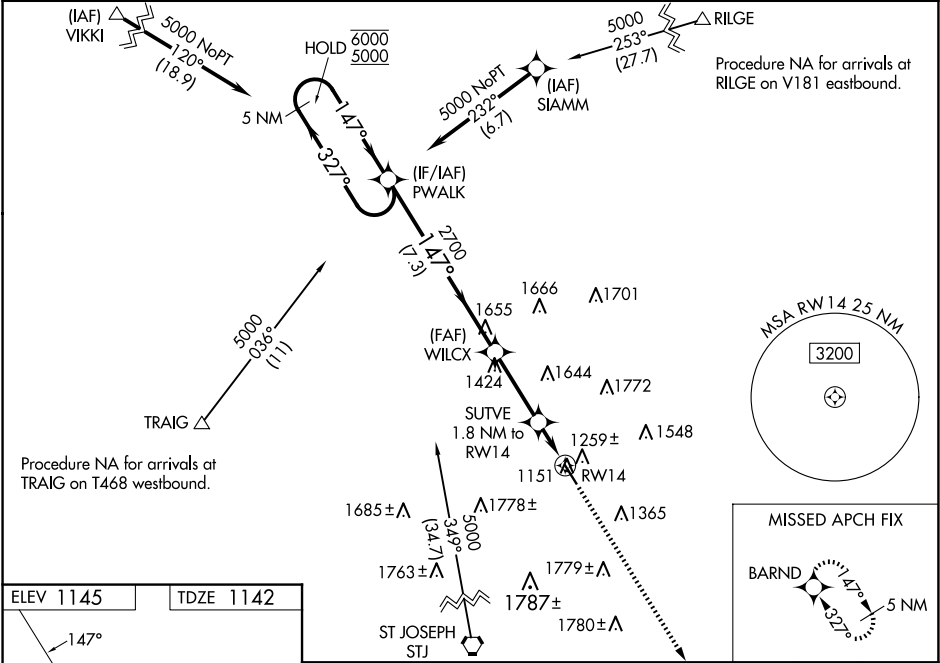

5 NM Holding Pattern				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).				6000	BARND
PWALK				WILCX				SUTVE 1.8 NM to RW14	
6000 ← 327°				2700				1.1 NM to RW14	
5000 → 147°				2700				RW14	
GP 3.00° TCH 40				1760					
				7.3 NM				3 NM	
								0.7	
								1.1	
CATEGORY	A		B		C		D		
LPV DA	1392-1		250 (300-1)				NA		
LNAV/ VNAV DA	1557-1 ³ / ₈		415 (500-1 ³ / ₈)				NA		
LNAV MDA	1520-1		378 (400-1)				NA		
CIRCLING	1560-1 415 (500-1)		1600-1 455 (500-1)		2120-3 975 (1000-3)		NA		