

APP CRS  
157°

Rwy Idg  
TDZE  
Apt Elev

4200  
1283  
1283

RNAV (GPS) RWY 16

MARYSVILLE MUNI (MYZ)

RNP APCH - GPS.


When local altimeter setting not received, use Beatrice altimeter setting and increase all MDAs 80 feet and increase LNAV Cat A and Circling Cats B/C visibility ¼ SM.

MISSED APPROACH: Climb to 3200 direct JELOK and hold.

AWOS-3PT  
118.675

KANSAS CITY CENTER  
123.8 343.7

UNICOM  
122.8 (CTAF) 0

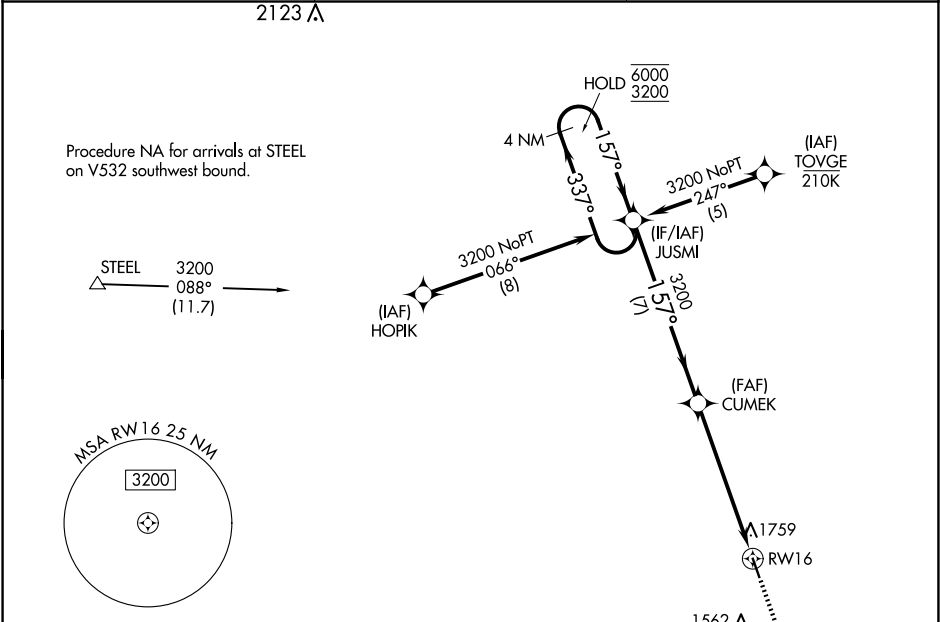

ELEV 1283

TDZE 1283

MISSED APCH FIX

JELOK

4 NM

157°

337°

Visual Segment - Obstacles.

3200

JELOK

4 NM Holding Pattern

JUSMI

CUMEK

6000 3200

337°

157°

3200

2.6 NM to RW16

RW16

7 NM

3.4 NM

2.6

| CATEGORY | A                       | B                       | C                       | D  |
|----------|-------------------------|-------------------------|-------------------------|----|
| LNAV MDA | 2140-1<br>857 (900-1)   | 2140-1¼<br>857 (900-1¼) | 2140-2½<br>857 (900-2½) | NA |
| CIRCLING | 2180-1¼<br>897 (900-1¼) | 2180-2¾<br>897 (900-2¾) | 2180-2¾<br>897 (900-2¾) | NA |

MIRL Rwy 16-34 0

REIL Rws 16 and 34 0