

AWOS-3
123.625
CLNC DEL
120.8
CTAF
123.0
HOUSTON DEP CON
123.8 257.7

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwy 9, 27: Standard with minimum
climb of 500' per NM to 580.



DEPARTURE ROUTE DESCRIPTION



TAKEOFF RUNWAY 9: Climb on heading
089° to 2000 for RADAR vectors to WYLSN,
thence. . . .

TAKEOFF RUNWAY 27: Climb on heading
269° to 2200 for RADAR vectors to WYLSN,
thence. . . .

. . . .on track 360° to MONNT, then on
(transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

GIFFA TRANSITION (WYLSN8.GIFFA)
MAJJK TRANSITION (WYLSN8.MAJKK)

TOP ALTITUDE:
ASSIGNED BY ATC

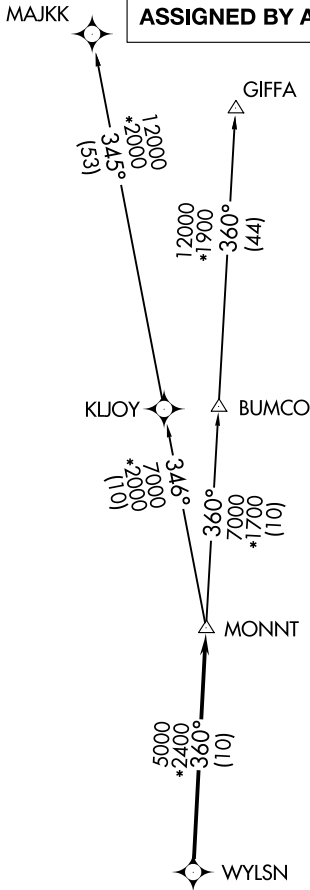

NOTE: Chart not to scale.