



WAAS CH 62925 W35A	APP CRS 356°	Rwy Idg TDZE 966 Apt Elev 966
--	------------------------	---

RNAV (GPS) RWY 35

OTTAWA MUNI (OWI)

RNP APCH.	MISSED APPROACH: Climb to 4000 direct ETIRY and hold, continue climb-in-hold to 4000.
▼ ▲ Circling NA to Rwy 13 and 31. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3PT 118.25	KANSAS CITY CENTER 127.725 270.25	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

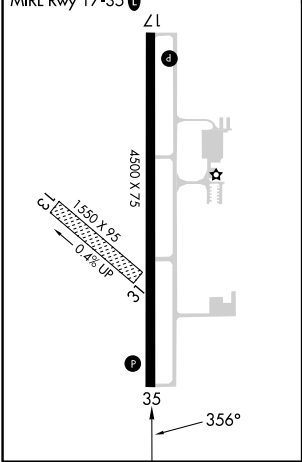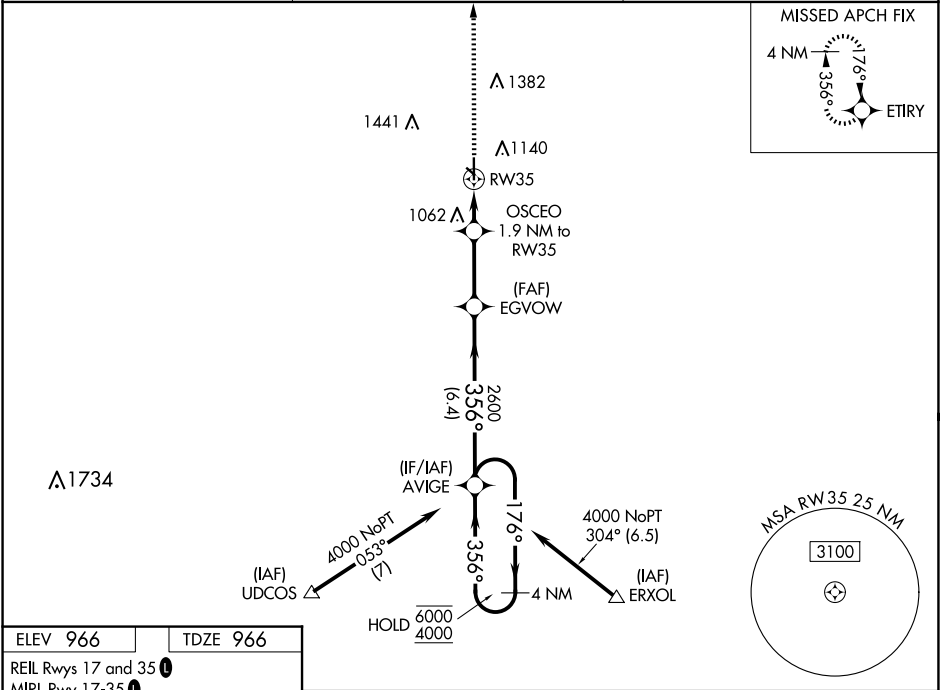

4000	ETIRY	VGSi and RNAV glidepath not coincident (VGSi Angle 3.25/TCH 28).			
*LNAV only.	OSCEO 1.9 NM to RW35	EGVOW 2600	AVIGE 4 NM Holding Pattern	176° → 6000 ← 356° 4000	GP 3.25° TCH 52
*1 NM to RW35					
-1 NM - 0.9 NM - 2.7 NM - 6.4 NM					
CATEGORY	A	B	C	D	
LPV DA	1216-1 250 (300-1)			NA	
LNAV/VNAV DA	1216-1 250 (300-1)			NA	
LNAV MDA	1320-1 354 (400-1)			NA	
CIRCLING	1500-1 534 (600-1)		1760-2¼ 794 (800-2¼)		NA