

WAAS CH 97434 W22A	APP CRS 218°	Rwy Idg 4204 TDZE 1378 Apt Elev 1379
--	------------------------	---

RNAV (GPS) RWY 22

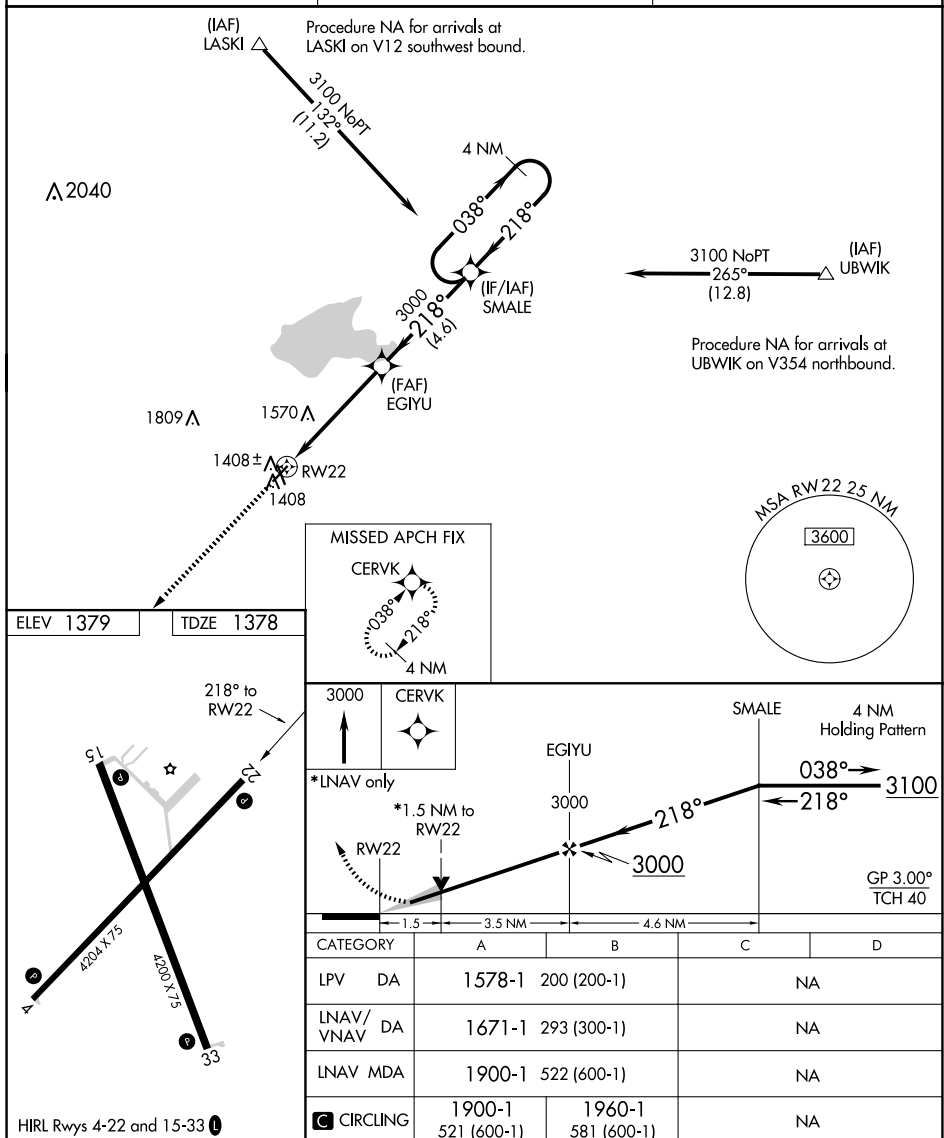
EL DORADO/CAPT JACK THOMAS MEML (EQA)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
CERVK and hold.

AWOS-3P
120.875

WICHITA APP CON
134.8 269.1

UNICOM
122.8 (CTAF) **L**

EL DORADO, KANSAS
Amdt 1A 23JUN16

EL DORADO/CAPT JACK THOMAS MEML (EQA)
37°46'N-96°49'W **RNAV (GPS) RWY 22**

NC-2, 27 NOV 2025 to 25 DEC 2025