

WAAS
CH **99334**
W04A

APP CRS
038°

Rwy Idg
TDZE
Apt Elev

4204
1376
1379

RNAV (GPS) RWY 4

EL DORADO/CAPT JACK THOMAS MEML (EQA)

⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet. Baro-VNAV NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH: Climb to 3100 direct SMALE and hold.

AWOS-3P
120.875

WICHITA APP CON
134.8 269.1

UNICOM
122.8 (CTAF) 0

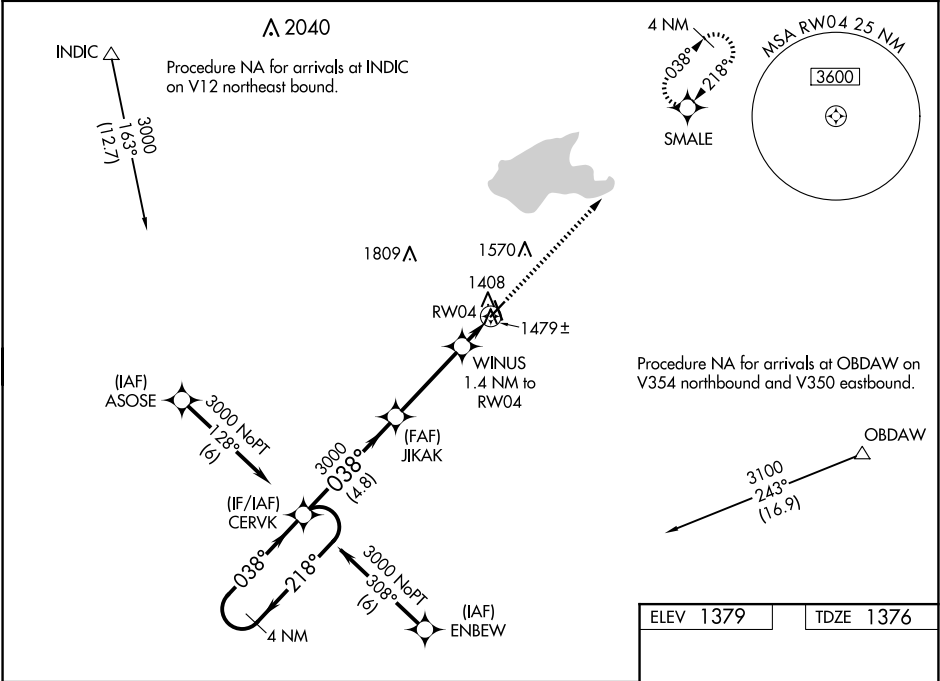

4 NM Holding Pattern
CERVK
3000
GP 3.00°
TCH 40
←218°
038°→
038°
3000
4.8 NM
3.6 NM
1.4 NM
3100 SMALE
*LNAV only
WINUS 1.4 NM to RW04
RW04
*1860

ELEV 1379

TDZE 1376

51
33
220° X 75
4200 X 75
038° to RW04

HIRL Rwy 4-22 and 15-33 0

CATEGORY	A	B	C	D
LPV DA	1576-1	200 (200-1)	NA	
LNAV/VNAV DA	1626-1	250 (300-1)	NA	
LNAV MDA	1740-1	364 (400-1)	NA	
CIRCLING	1820-1 441 (500-1)	1960-1 581 (600-1)	NA	

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025