

LONDON, OHIO

AL-6621 (FAA)


25163

WAAS CH 53409 W09A	APP CRS 093°	Rwy Ldg TDZE Apt Elev	4000 1082 1082
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 9
MADISON COUNTY (UYF')

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct AKPUC and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	

AWOS-3PT 120.85	COLUMBUS APP CON 134.0 279.6	UNICOM 123.0 (CTAF) 0
---------------------------	--	---------------------------------

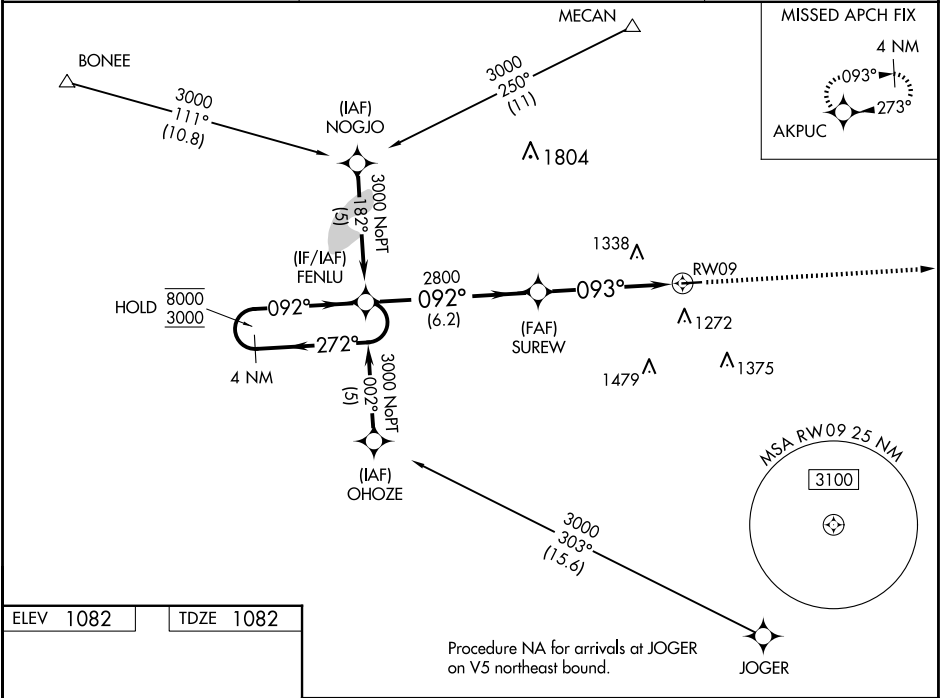

ELEV 1082	TDZE 1082
-----------	-----------

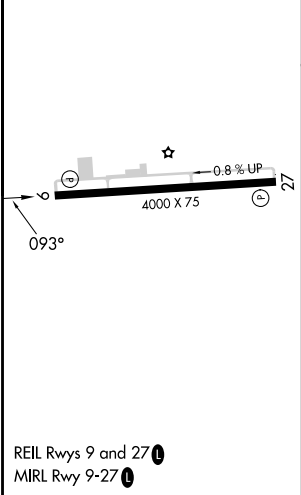

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		3000	AKPUC
8000 ← 272°		FENLU		*LNNAV only.	
3000 → 092°		SUREW		*1.5 NM to RW09	
GP 3.00° TCH 40		2800		RW09	
		6.2 NM		3.7 NM	
				1.5	
CATEGORY	A	B	C	D	
LPV DA	1332-1 250 (300-1)				
LNAV/VNAV DA	1548-1 3/4 466 (500-1 3/4)				
LNAV MDA	1580-1 498 (500-1)		1580-1 3/8 498 (500-1 3/8)		1580-1 1/2 498 (500-1 1/2)
CIRCLING	1600-1 518 (600-1)	1640-1 558 (600-1)	1640-1 1/2 558 (600-1 1/2)	1840-2 1/2 758 (800-2 1/2)	