


WAAS CH 90117 W25A	APP CRS 254°	Rwy Ldg TDZE Apt Elev	7281 1475 1478
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25L

PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS	When VGSI inop, Circling to Rwy 25R NA at night. Circling NA north of Rwy 7R-25L at night. When local altimeter setting not received, use Scottsdale altimeter setting; increase LPV all Cats DA to 1877 feet and LPV all Cats visibility ¼ SM. Increase all MDA 40 feet and Circling Cats B visibility ¼ SM. Rwy 25L helicopter visibility reduction below ¾ SM NA. VDP NA when using Scottsdale altimeter setting.	MISSED APPROACH: Climb to 6000 direct BOLES and on track 314° to HEVRO and right turn on track 072° to BANYO and hold.
----------------	--	--

ATIS 126.5	PHOENIX APP CON 120.7 239.0	DEER VALLEY TOWER ★ 118.4 (070°-250°) (CTAF) 120.2 (251°-069°)	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	--	-------------------------	-------------------------

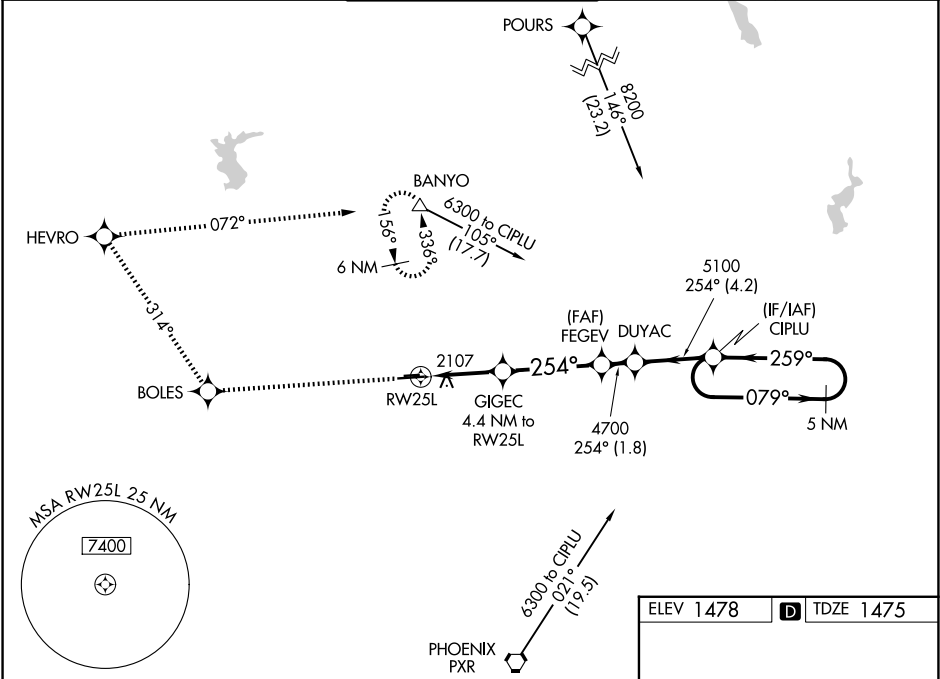

6000	BOLES	tr 314°	HEVRO	tr 072°	BANYO
2.6 NM	1.8	5.3 NM	1.8 NM	4.2 NM	
CATEGORY	A	B	C	D	
LPV DA	1850-1¼ 375 (400-1¼)				
LNAV MDA	2360-1¼ 885 (900-1¼)		2360-2¾ 885 (900-2¾)		2360-3 885 (900-3)
CIRCLING	2400-1¼ 922 (1000-1¼)		2420-1¼ 942 (1000-1¼)		2580-3 1102 (1200-3)
			2700-3 1222 (1300-3)		

