WAAS CH 78335 W14A	APP CRS 143°	Rwy ldg 4400 TDZE 1798 Apt Elev 1800

RNAV (GPS) RWY 14
SMITH CENTER MUNI (K82)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CNK altimeter setting. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2172 feet; increase LNAV/VNAV DA to 2250 and all visibilities ⅜ SM; increase all MDAs 180 feet and Circling all Cats visibility ½ SM.

MISSED APPROACH: Climb to 3700 direct JUXUL and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.45	119.4 278.8	122.8 (CTAF) L

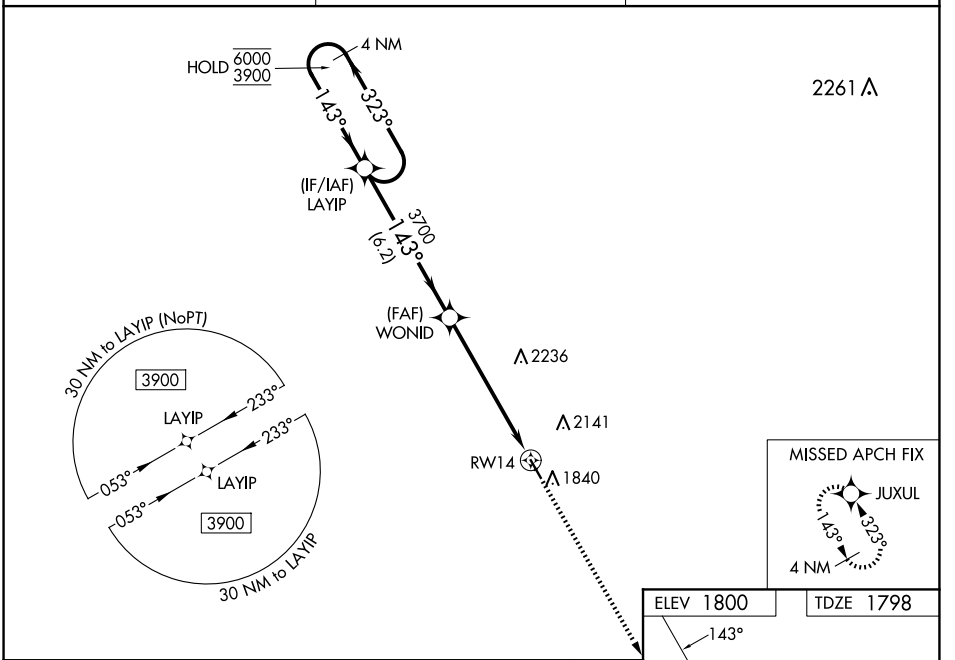

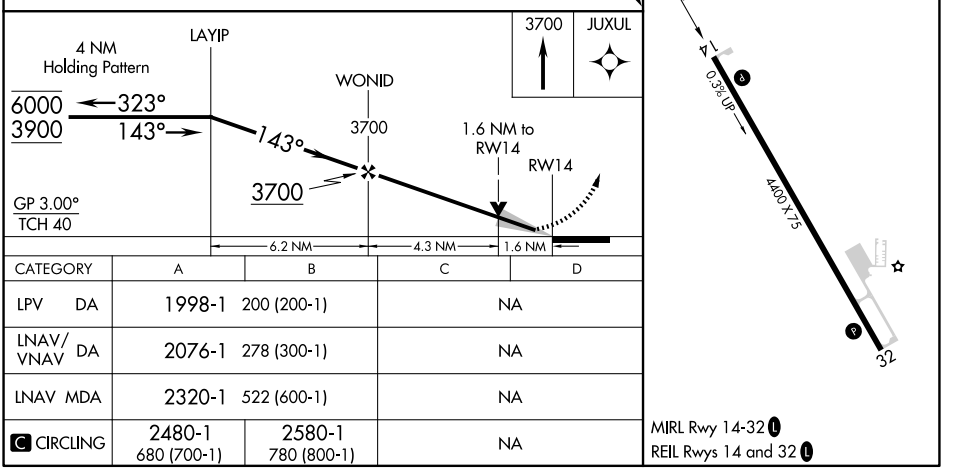

CATEGORY	A	B	C	D
LPV DA	1998-1 200 (200-1)		NA	
LNAV/VNAV DA	2076-1 278 (300-1)		NA	
LNAV MDA	2320-1 522 (600-1)		NA	
C CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025