

WAAS CH 63135 W32A	APP CRS 323°	Rwy Idg 4400 TDZE 1800 Apt Elev 1800
--	------------------------	---

RNAV (GPS) RWY 32
SMITH CENTER MUNI (K82)

RNP APCH - GPS.

A Baro-VNAV and VDP NA when using CNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2174 feet; increase LNAV/VNAV DA to 2224 feet and all visibilities ½ SM; increase all MDAs 180 feet, and Circling all visibilities ½ SM.


MISSED APPROACH: Climb to 3900 direct LAYIP and hold.

AWOS-3PT
118.45

MINNEAPOLIS CENTER
119.4 278.8

UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX



Λ 2236

²¹⁴¹Δ

RW32  1840


(FAF)
WULOS

(IF/IAF)

-HOLD 6000
3700

ELEV 1800

TDZE 1800

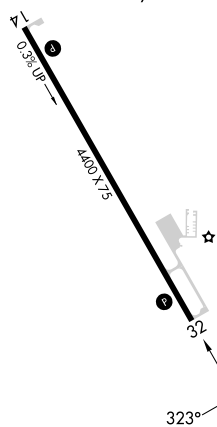MIRL Rwy 14-32 **L**REIL Rwy 14 and 32 **L**

3900	LAYIP
	

WULO

4 NM
Holding Pattern

$$\begin{array}{r} 143^\circ \rightarrow 6000 \\ - 323^\circ \quad \underline{\hspace{1cm}} \\ 3700 \end{array}$$

GP 3.00°
TCH 40

CATEGORY		A	B	C	D
LPV	DA	2000-1	200 (200-1)	NA	
INAV/ VNAV	DA	2050-1	250 (300-1)	NA	
INAV	MDA	2300-1	500 (500-1)	NA	
 CIRCLING		2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

SMITH CENTER, KANSAS
Orig-E 20FEB25

39°46'N-98°48'W

SMITH CENTER MUNI (K82)
RNAV (GPS) RWY 32