



RNAV 1 - DME/DME/IRU or GPS.	TOP ALTITUDE: 3000	CHARLOTTE DEP CON 128.325 307.8 AWOS-3 128.175 CLNC DEL 121.75 254.375 GND CON 121.75 254.375 STANLY COUNTY TOWER★ 126.275 (CTAF) 291.9
RADAR required.		



TAKEOFF MINIMUMS
Rwys 4L, 22R: NA-Environmental.
Rwy 22L: Standard.
Rwy 4R: 300-1¾ or standard with minimum
climb of 315' per NM to 1000.

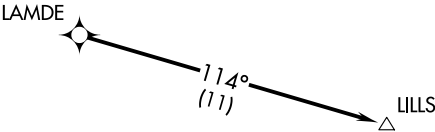

- NOTE: For turbo jets only.
- NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

▼

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, on RADAR vectors to LAMDE, then on depicted route to LILLS. Maintain 3000. Expect clearance to filed altitude within 10 minutes after departure.

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025