

VORTAC INK	APP CRS	Rwy Ldg	4268
112.1	125°	TDZE	2609
Chan 58		Apt Elev	2615

VOR/DME RWY 12

ROY HURD MEML (E01)


⚠ When local altimeter setting not received, use INK altimeter setting and increase all MDAs 80 feet and S-12 visibility Cat C ½ SM, and Circling visibility Cat C ½ SM.

⚠ Straight-in Rwy 12 NA at night, Circling Rwy 1, 12, 19 NA at night.


Rwy 12 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 5000 direct INK VORTAC and hold.

AWOS-3PT	FORT WORTH CENTER	UNICOM
118.225	133.1 298.95	122.8 (CTAF) 1

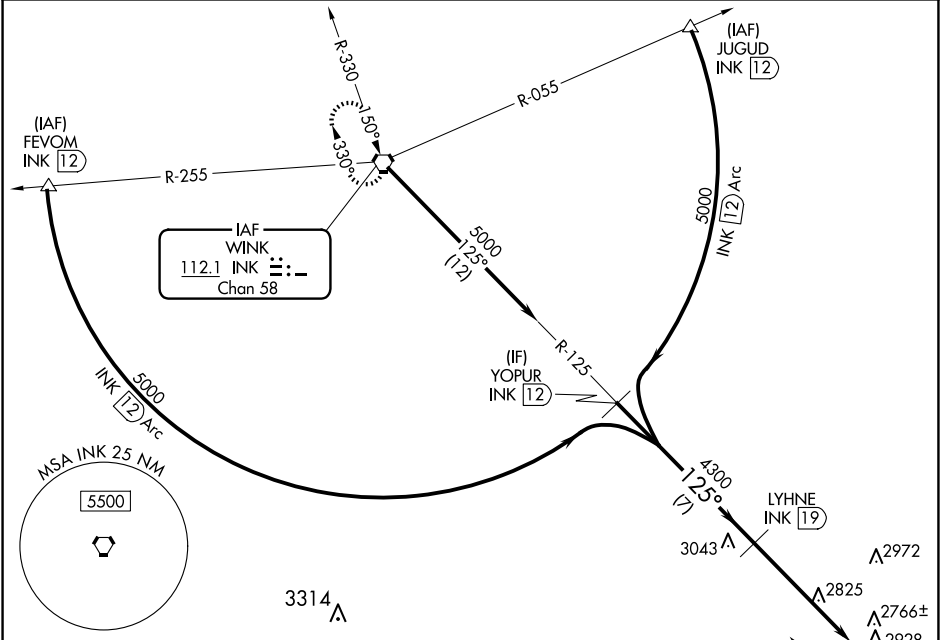

ELEV 2615	TDZE 2609
-----------	-----------



VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 24).				5000	INK
YOPUR INK 12					
LYHNE INK 19					
Procedure Turn NA					
5000					
4300					
125°					
3.02° TCH 45					
7 NM					
5.2 NM					
INK 24.2					
CATEGORY	A	B	C	D	
S-12	3340-1 731 (800-1)	3340-1¼ 731 (800-1¼)	3340-2 731 (800-2)	NA	
CIRCLING	3340-1 725 (800-1)	3340-1¼ 725 (800-1¼)	3340-2 725 (800-2)	NA	