

WAAS CH 69418 W25A	APP CRS 247°	Rwy Idg TDZE Apt Elev	3434 8 9
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) RWY 25

BEAUFORT EXEC (ARW)



⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beaufort MCAS (Merritt Fld) altimeter setting and increase LPV DA to 226, LNAV/VNAV DA to 352, and all MDA 20 feet. VDP and Baro-VNAV NA when using Beaufort MCAS (Merritt Fld) altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
EROMY and hold.

AWOS-3 119.675	BEAUFORT APP CON★ 125.125 292.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

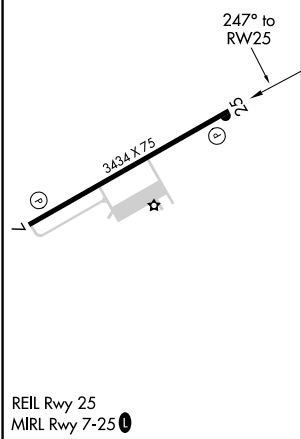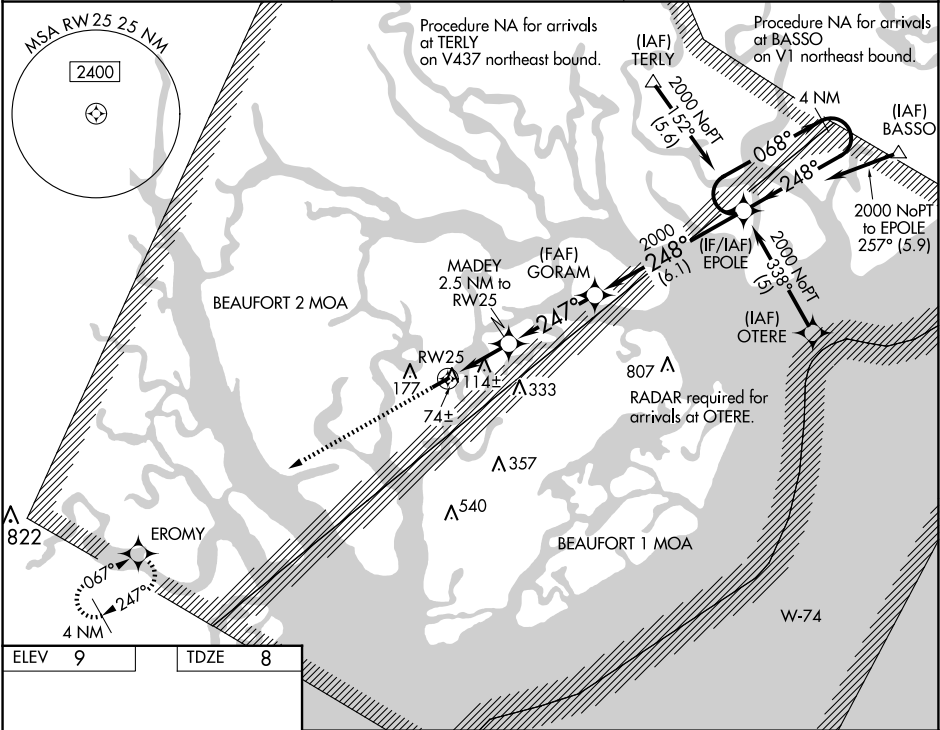

2000 ↑ EROMY		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).		
*LNAV only.		GORAM 2000		
MADEY 2.5 NM to RW25		EPOLE 4 NM Holding Pattern		
*1.1 NM to RW25		2000		
RW25		GP 3.00° TCH 40		
-1.1 -1.4 -3.5 NM -6.1 NM				
CATEGORY	A	B	C	D
LPV DA	208-1	200 (200-1)		NA
LNAV/ VNAV DA	334-1¼	326 (400-1¼)		NA
LNAV MDA	380-1	372 (400-1)		NA
CIRCLING	480-1	471 (500-1)	640-1¾ 631 (700-1¾)	NA

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025