

WAAS Ch 93725 W09A	APP CRS 093°	Rwy Idg 4800 TDZE 483 Apt Elev 483
--	------------------------	---


RNAV (GPS) RWY 9

WALKER COUNTY/BEVILL FLD (JFXX)

Baro-VNAV NA when using Birmingham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Birmingham altimeter setting and increase all DA 104 feet and all MDA 120 feet; increase LPV all Cats, LNAV Cats C/D and Circling Cat D visibility ¼ mile increase LNAV/VNAV all Cats and Circling Cat C visibility ⅓ mile.

MISSED APPROACH:
Climb to 2800 direct
SIPSY and hold.

AWOS-3PT 119.225	BIRMINGHAM APP CON 127.675 338.2	GCO 121.725	UNICOM 123.075 (CTAF) 0
----------------------------	--	-----------------------	-----------------------------------

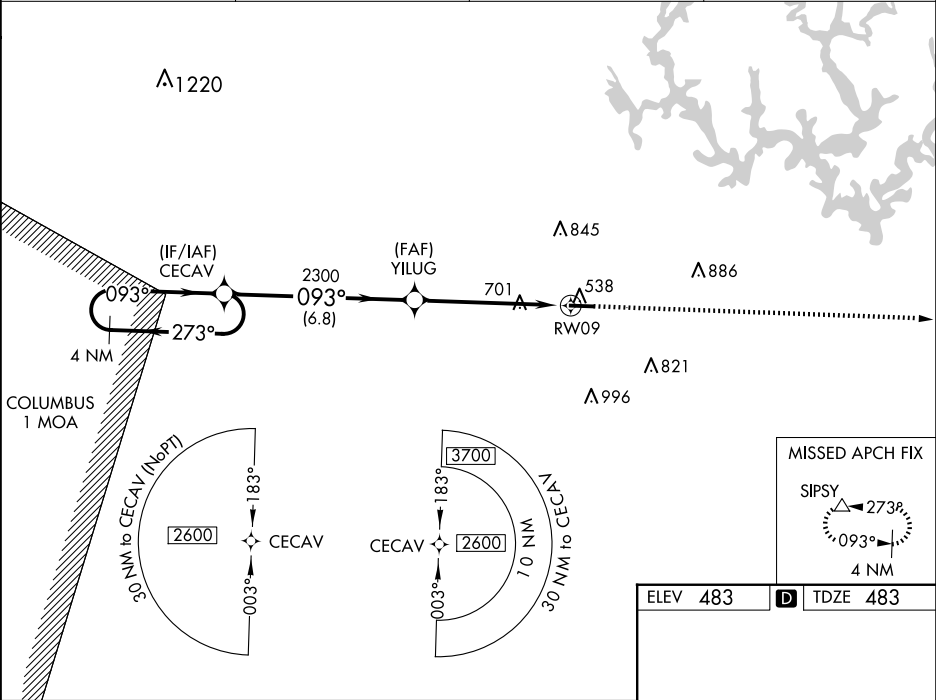

4 NM Holding Pattern

CECAV

YILUG

2600 ← 273°
093° →

GP 3.00°
TCH 40

2300

2300

RW09

6.8 NM

5.6 NM

2800

SPSY

△

5004 X 100

093°

27

CATEGORY	A	B	C	D
LPV DA	751-1	268 (300-1)		
LNAV/VNAV DA	952-1½	469 (500-1½)		
LNAV MDA	1040-1	557 (600-1)	1040-1½	557 (600-1½)
CIRCLING	1040-1 557 (600-1)	1080-1 597 (600-1)	1160-2 677 (700-2)	1360-2¾ 877 (900-2¾)

MIRL Rwy 9-27 0

REIL Rws 9 and 27 0