

LOC/DME I-JKA

110.7

Chan 44

APP CRS

270°

Rwy Ldg

6500

TDZE

17

Apt Elev

17

ILS or LOC RWY 27

GULF SHORES INTL/JACK EDWARDS FLD (JKA)

▼

▲


Circling Rwy 17, 35 NA at night. VDP NA with Pensacola Intl altimeter setting. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase DA to 295 feet; increase all MDAs 80 feet; increase S-LOC 27 visibility Cats C and D ¾ SM; increase S-LOC 27 GEVBE FIX minimums visibility Cats C and D visibility ¼ SM; increase all Circling visibility Cat C and D ¼ SM. GEVBE FIX MINIMUMS: For inop ALS, increase S-LOC 27 visibility Cats C and D to 1½ SM. PENSACOLA INTL ALTIMETER SETTING MINIMUMS: For inop ALS, increase S-ILS 27 visibility all Cats to ¾, increase S-LOC 27 visibility Cats C and D to 1¾ SM; increase GEVBE FIX minimums S-LOC 27 visibility Cats C and D to 1¾ SM.

MALSR

MISSED APPROACH:

Climb to 2000 on heading 270° and BFM VORTAC R-145 to URIVY INT/BFM 12.6 DME and hold.

ATIS 134.525	PENSACOLA APP CON 120.65 270.8	GULF SHORES TOWER ★ 118.65 (CTAF) 0	CLNC DEL 121.7	CLNC DEL 124.55 (When twr clsd)	GND CON 121.7	UNICOM 122.7
-----------------	-----------------------------------	--	-------------------	---------------------------------------	------------------	-----------------

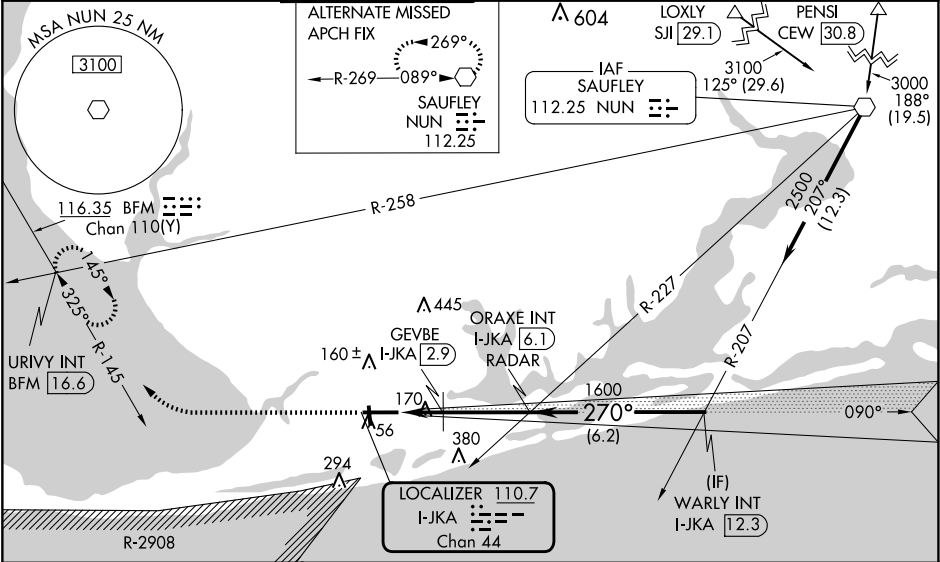

ELEV 17

D

TDZE 17

2000

hdg 270°

BFM R-145

URIVY INT

*LOC only.

ORAXE INT I-JKA [6.1]

WARLY INT I-JKA [12.3]

GEVBE I-JKA [2.9]

I-JKA [1.3]

I-JKA [2.4]

**540

1600

2500

GS 3.00°

TCH 47

1.1 NM

0.5

3.2 NM

6.2 NM

CATEGORY	A	B	C	D
S-ILS 27	217-½ 200 (200-½)			
S-LOC 27	540-½	523 (600-½)	540-1	523 (600-1)
CIRCLING	540-1	523 (600-1)	740-2 723 (800-2)	740-2¼ 723 (800-2¼)
GEVBE FIX MINIMUMS				
S-LOC 27	420-½	403 (500-½)	420-¾	403 (500-¾)
CIRCLING	480-1	463 (500-1)	740-2 723 (800-2)	740-2¼ 723 (800-2¼)

MIRL Rwy 17-35

HIRL Rwy 9-27

FAF to MAP 4.8 NM

Knots

60 90 120 150 180

Min:Sec

4:48 3:12 2:24 1:55 1:36