


RNAV (GPS) RWY 28

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)


T Rwy 28 helicopter visibility reduction below 1 SM NA. Baro-VNAV and VDP NA when using CWV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use CWV altimeter setting.

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct LOTTS and hold.


UNICOM
123.0 (CTAF) **L**

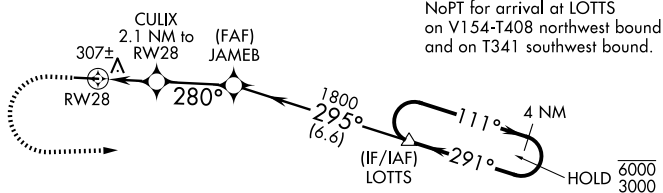

NoPT for arrival at LOTTS
on V154-T408 northwest bound
and on T341 southwest bound.



TDZE 197

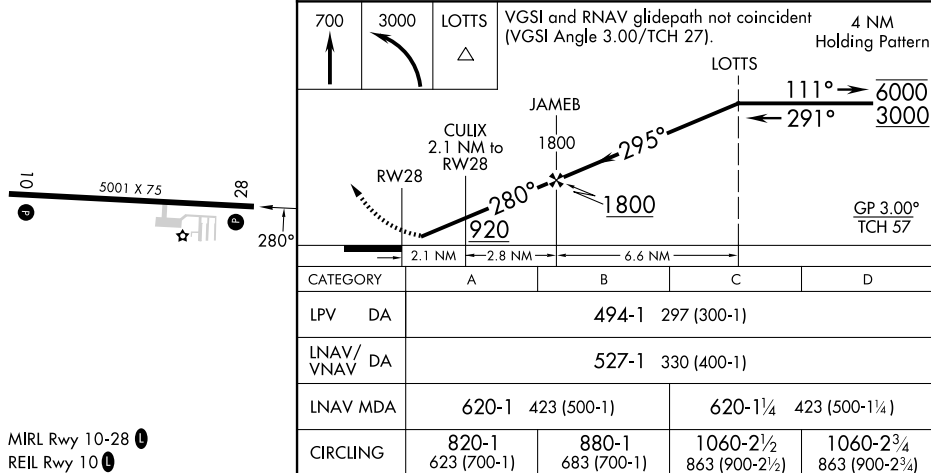

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)
32°22'N-82°05'W PNAV (GPS) RWY 28

RNAV (GPS) RWY 28