


RNP APCH.

⚠

When local altimeter setting not received, use Charlotte altimeter setting: increase LPV DA to 1212 feet, LNAV/VNAV DA to 1204 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 80 feet and visibility Cats C and D $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Charlotte altimeter setting. Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 3200 direct
IWWON and hold.

AWOS-3 119.675	CHARLOTTE APP CON 134.75 257.2	CLNC DEL (GCO) 124.9	UNICOM 123.05 (CTAF) 0
--------------------------	--	--------------------------------	---

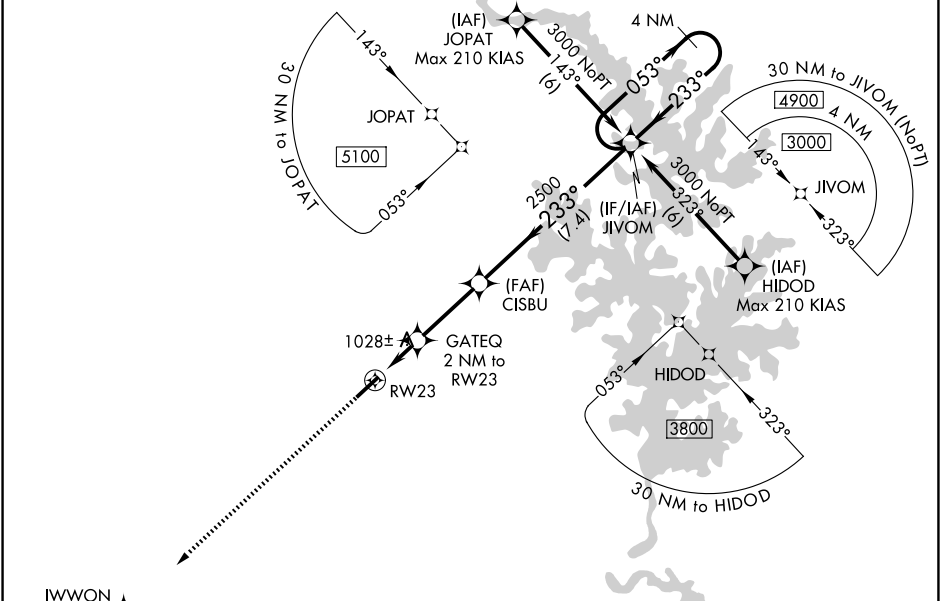

ELEV 878		TDZE 872	
3200 IWWON		4 NM Holding Pattern	
* LNAV only		GP 3.00° TCH 47	
RWY 23		5700 X 100	
1.2 NM		0.8 NM	
3 NM		7.4 NM	
CATEGORY	A	B	C
LPV DA	1149-7/8	277 (300-7/8)	
LNAV/VNAV DA	1141-7/8	269 (300-7/8)	
LNAV MDA	1280-1	408 (500-1)	1280-1 1/8 408 (500-1 1/8)
CIRCLING	1400-1	1440-1	1640-2 1/4 1640-2 1/2
	522 (600-1)	562 (600-1)	762 (800-2 1/4) 762 (800-2 1/2)