

WAAS CH 42502 W34A	APP CRS 343°	Rwy ldg TDZE Apt Elev	4601 16 16
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 34


EMMONAK (ENM) (PAEM)

▼ If local altimeter setting not received, use St Mary's altimeter setting and increase all DAs 168 feet and MDAs 180 feet. VDP NA with St Mary's altimeter setting. DME/DME RNP- 0.3 NA. Baro-VNAV NA when using St Mary's altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F).

▲

MISSED APPROACH: Climb to 1600 direct ECKIX and left turn via 253° track to ZEDET and left turn via 149° track to OFQIM and hold.

AWOS-3P 135.35	ANCHORAGE CENTER 124.0	CTAF 122.9 0
--------------------------	----------------------------------	-------------------------------

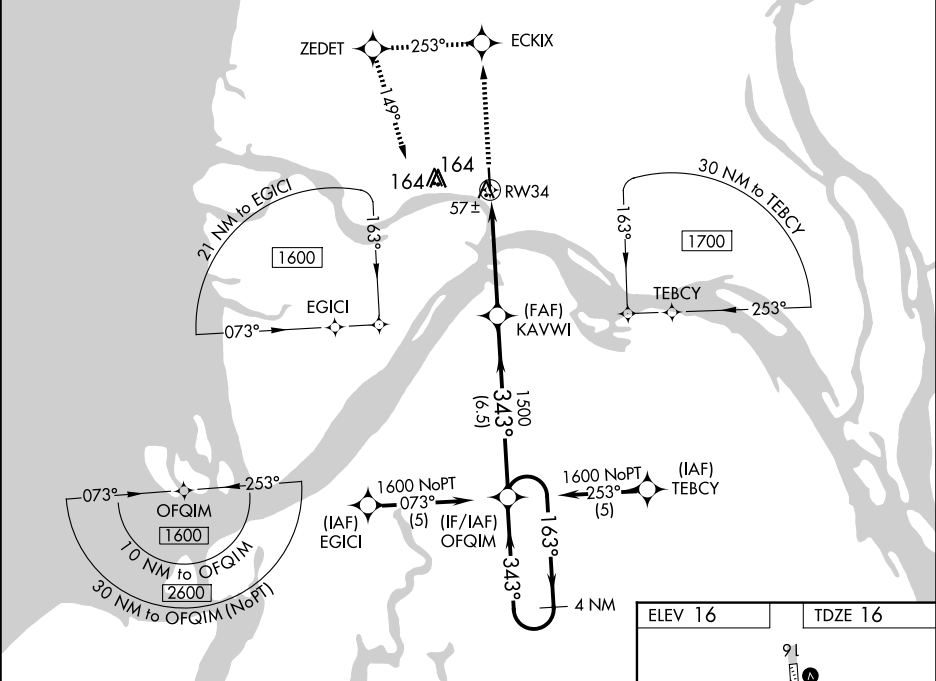

1600	ECKIX	tr 253°	ZEDET	tr 149°	OFQIM	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).
* LNAV only						
*0.9 NM to RWY34						
KAVWI						
1500						
343°						
163°						
Holding Pattern						
1600						
GP 3.00°						
TCH 35						
CATEGORY	A	B	C	D		
LPV DA	266-1		250 (300-1)			
LNAV/ VNAV	320-1		304 (400-1)			
LNAV MDA	320-1		304 (400-1)			
CIRCLING	520-1	504 (600-1)	520-1½ 504 (600-1½)	580-2 564 (600-2)		

