

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>53714</b><br><b>W16A</b> | APP CRS<br><b>159°</b> | Rwy Idg<br>TDZE <b>2160</b><br>Apt Elev <b>2160</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 16

PIONEER VILLAGE FLD (ØV3)


⚠

NA


Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.

MISSED APPROACH: Climb to 3700 direct MEDOC and hold.

|                                |                                          |                                        |
|--------------------------------|------------------------------------------|----------------------------------------|
| EAR AWOS-3PT<br><b>123.875</b> | MINNEAPOLIS CENTER<br><b>119.4 278.8</b> | UNICOM<br><b>122.7</b> (CTAF) <b>Ø</b> |
|--------------------------------|------------------------------------------|----------------------------------------|

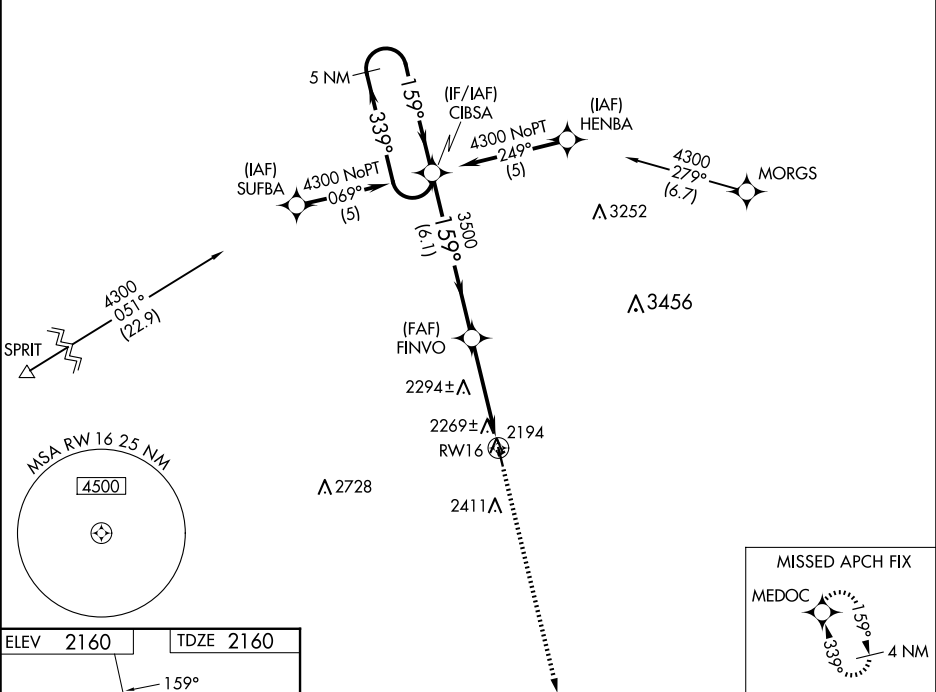

|                  |                  |
|------------------|------------------|
| ELEV <b>2160</b> | TDZE <b>2160</b> |
|------------------|------------------|

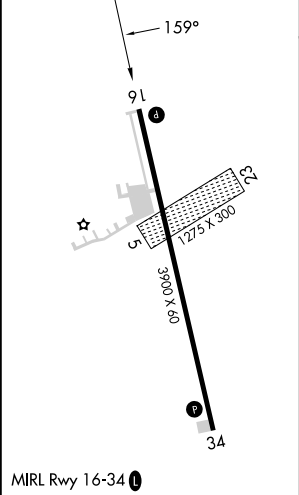

|                      |                       |                       |    |        |        |
|----------------------|-----------------------|-----------------------|----|--------|--------|
| 5 NM Holding Pattern |                       |                       |    | 3700   | MEDOC  |
| 4300 ← 339° 159° →   |                       |                       |    | ↑      | ✦      |
| GP 3.00° TCH 40      |                       |                       |    | FINVO  |        |
|                      |                       |                       |    | 3500   | RW16   |
|                      |                       |                       |    | 6.1 NM | 4.1 NM |
| CATEGORY             | A                     | B                     | C  | D      |        |
| LPV DA               | 2445-1                | 285 (300-1)           | NA |        |        |
| LNAV/VNAV DA         | 2574-1½               | 414 (500-1½)          | NA |        |        |
| LNAV MDA             | 2580-1                | 420 (500-1)           | NA |        |        |
| CIRCLING             | 2680-1<br>520 (600-1) | 2780-1<br>620 (700-1) | NA |        |        |

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025