

APP CRS
339°

Rwy Idg
TDZE
Apt Elev

3900
2160
2160

RNAV (GPS) RWY 34

PIONEER VILLAGE FLD (ØV3)


RNP APCH - GPS.

▼
▲ NA

Rwy 34 helicopter visibility reduction below 1 SM NA. Use EAR altimeter setting; when not received, use HDE altimeter setting and increase all MDAs 40 feet. Procedure NA at night.

MISSED APPROACH: Climb to 4300 direct CIBSA and hold.

EAR AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.7 (CTAF) 0
-------------------------	-----------------------------------	--------------------------

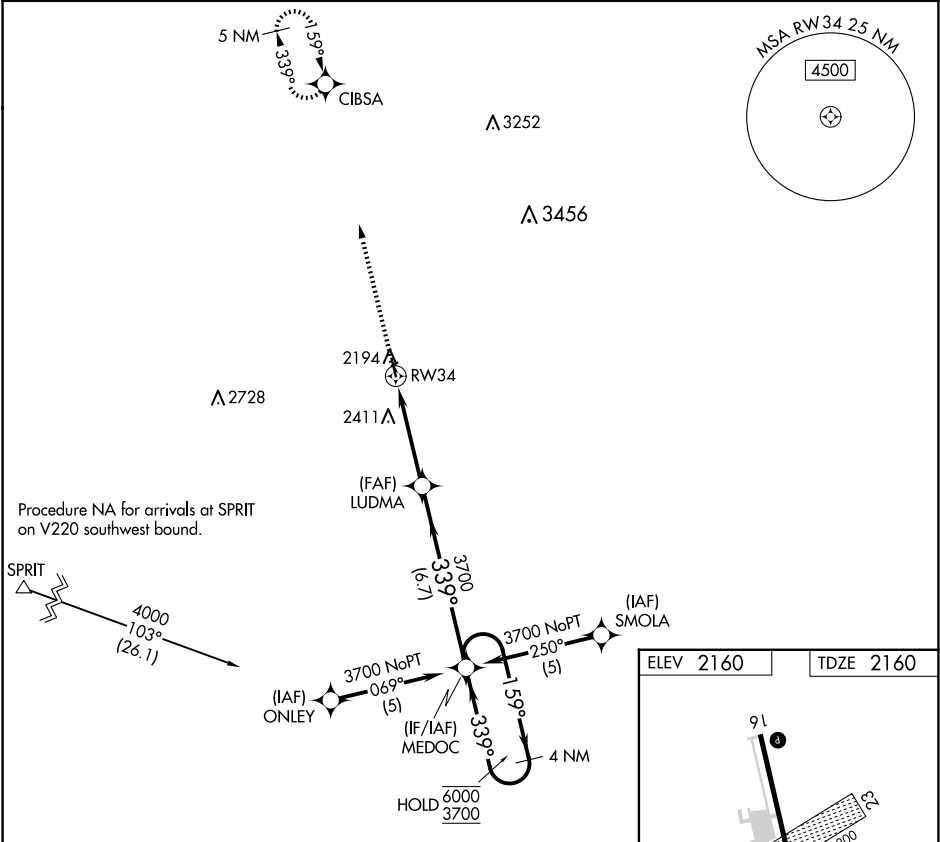

4300

CIBSA

↑

✱

LUDMA

MEDOC

4 NM Holding Pattern

3700

339°

159°

6000

3700

339°

3.50°

TCH 40

4.1 NM

6.7 NM

CATEGORY	A	B	C	D
LNAV MDA	2700-1	540 (600-1)	NA	

MIRL Rwy 16-34 0

91

1275 X 300

3900 X 80

34

339°