

WAAS CH 82517 W12A	APP CRS 120°	Rwy Idg 4501 TDZE 413 Apt Elev 425
--	------------------------	---


RNAV (GPS) RWY 12

SHAFTER-MINTER FLD (MIT')

Baro-VNAV NA when using Bakersfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Bakersfield altimeter setting and increase LPV and LNAV/VNAV DA to 694 feet and LNAV/VNAV visibility to ¾ all Cats; increase all MDA 40 feet. DME/DME RNP-0.3 NA. Night Landing Rwy 17, 35, 8, 26 NA.

MISSED APPROACH: Climb to 3000 direct TIPVE and on track 199° to MARIC and hold.

AWOS-3 121.125	BAKERSFIELD APP CON ★ 126.45 270.3	CTAF 122.9
--------------------------	--	----------------------

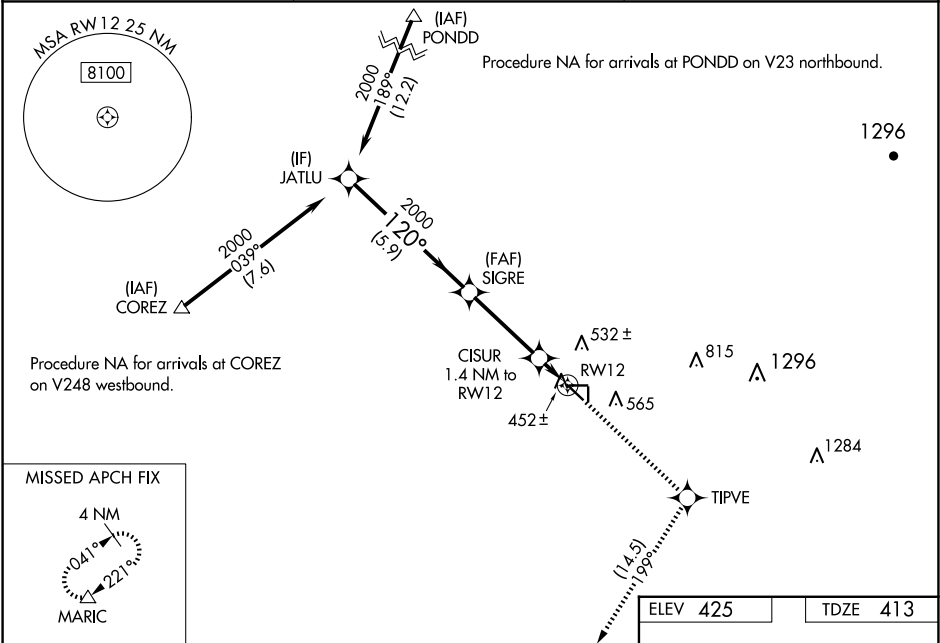

JATLU		SIGRE		3000	TIPVE	tr 199°	MARIC
2000		2000		CISUR 1.4 NM to RW12		*LNAV only	
GP 3.00° TCH 45		*900		*0.8 NM to RW12		RW12	
5.9 NM		3.4 NM		0.6 NM		0.8 NM	
CATEGORY	A	B	C	D			
LPV DA	663-¾ 250 (300-¾)			NA			
LNAV/VNAV DA	663-¾ 250 (300-¾)			NA			
LNAV MDA	740-1 327 (300-1)			NA			
CIRCLING	900-1	475 (500-1)	940-1½ 515 (600-1½)	NA			

MIRL Rwy 12-30
REIL Rws 12 and 30

3680 X 60
0.3% UP
4301 X 100
2972 X 100
0.3% UP
35