

VORTAC EHF	APP CRS	Rwy Idg	N/A
115.4	269°	TDZE	N/A
Chan 101		Apt Elev	425



VOR-A

SHAFTER-MINTER FLD (MIT)

NA Circling to Rwy 17, 35, 8 and 26 NA at night. When local altimeter setting not received, use Bakersfield altimeter setting and increase all MDAS 40 feet and increase Cat C visibility to 1¾.

MISSED APPROACH: Climb to 4000 on EHF VORTAC R-269 to SCRAP INT/EHF 14.7 DME and hold, continue climb-in-hold to 4000.

AWOS-3 121.125	BAKERSFIELD APP CON ★ 126.45 270.3	CTAF 122.9
--------------------------	--	----------------------

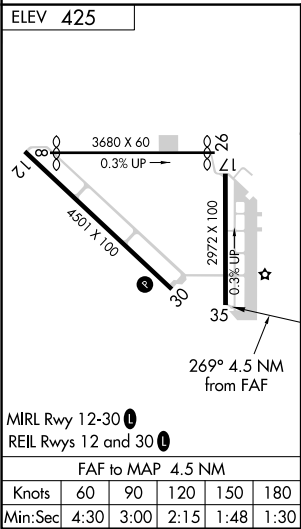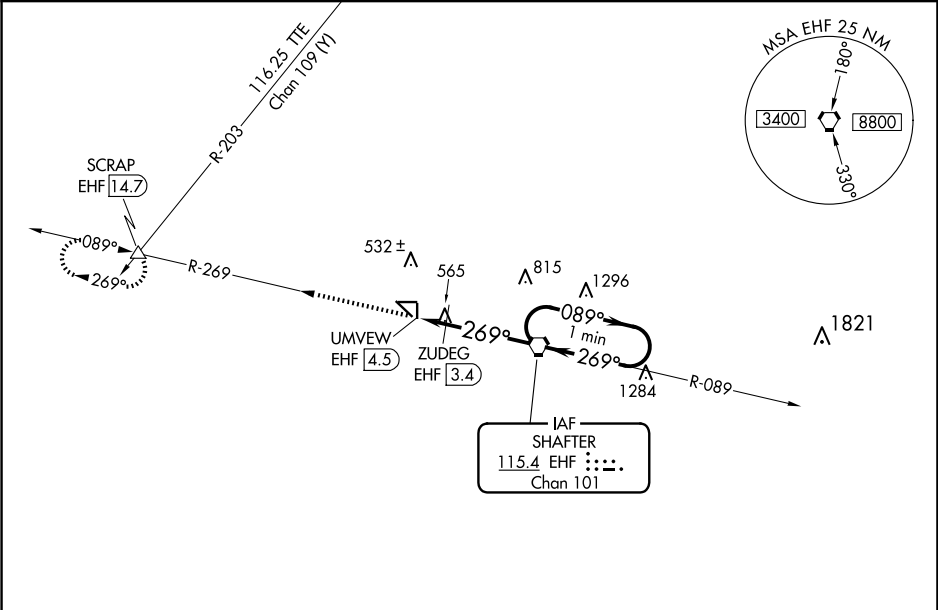

4000	SCRAP	One Minute Holding Pattern			
EHF R-269	ZUDEG EHF 3.4	EHF VORTAC	089°	2900	
UMVEW EHF 4.5	269°	2600	269°		*1040 when using Bakersfield altimeter setting.
1000*	1.1 NM	3.4 NM			
CATEGORY	A	B	C	D	
CIRCLING	1000-1	575 (600-1)	1000-1½	575 (600-1½)	NA
ZUDEG FIX MINIMUMS					
CIRCLING	900-1	475 (500-1)	940-1½	515 (600-1½)	NA