

WAAS CH 40319 W31A	APP CRS 317°	Rwy Idg TDZE 1140 Apt Elev 1140	4002
--	------------------------	---	-------------

RNAV (GPS) RWY 31

LITCHFIELD MUNI (LJF)

RNP APCH - GPS.


▼

Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When Local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1435 feet; increase LNAV/VNAV DA to 1594 feet; increase all MDA 60 feet and LNAV and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.

MISSED APPROACH:

Climb to 2900 direct UNII1 and hold.

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

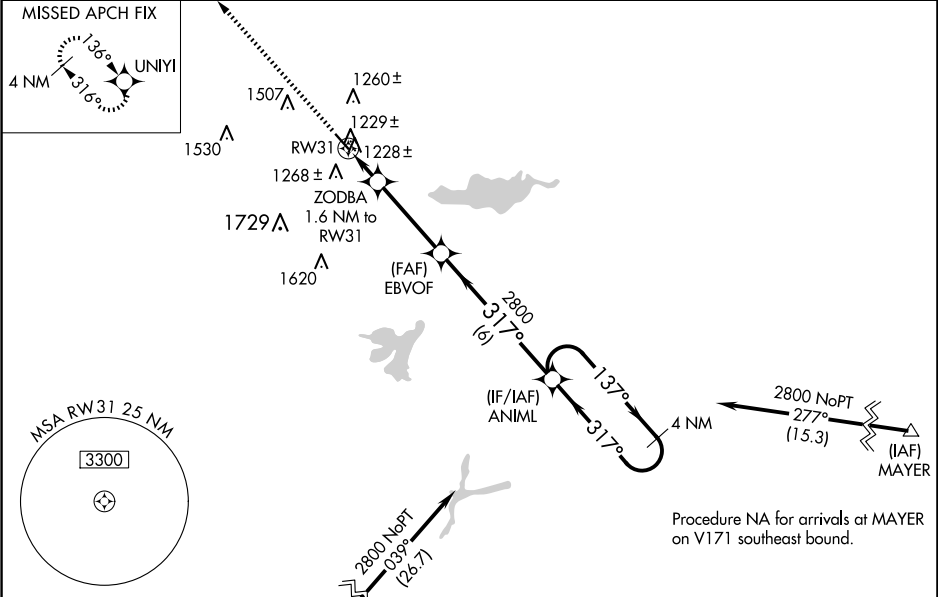

ELEV 1140	TDZE 1140
------------------	------------------

REIL Rwy 13 and 31

MIRL Rwy 13-31

2900	UNII1	EBVOF	ANI1	4 NM Holding Pattern
*LNAV only	ZODBA 1.6 NM to RW31	2800	317°	137°
0.9 NM to RW31	1680	2800	317°	2800
0.9	0.7	3.4 NM	6 NM	GP 3.00° TCH 39

CATEGORY	A	B	C	D
LPV DA	1389-1 249 (300-1)			
LNAV/VNAV DA	1548-1½ 408 (500-1½)			
LNAV MDA	1480-1 340 (400-1)			
CIRCLING	1600-1	460 (500-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)

NC-1, 27 NOV 2025 to 25 DEC 2025

NC-1, 27 NOV 2025 to 25 DEC 2025