

WAAS CH 48915 W36A	APP CRS 005°	Rwy Idg TDZE 458 Apt Elev 458
--	------------------------	---

RNAV (GPS) RWY 36



PHILADELPHIA MUNI (MPF)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Key Fld altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV, LNAV/VNAV all Cats, LNAV Cats C and D visibility ½ mile, increase Circling Cats C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Key Fld altimeter setting.

MISSED APPROACH:
Climb to 3000 direct WADIS and hold.

AWOS-3P 118.725	MEMPHIS CENTER 132.75 263.0	UNICOM 123.0 (CTAF)
---------------------------	---------------------------------------	-------------------------------

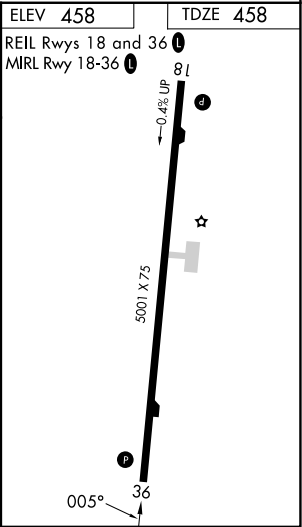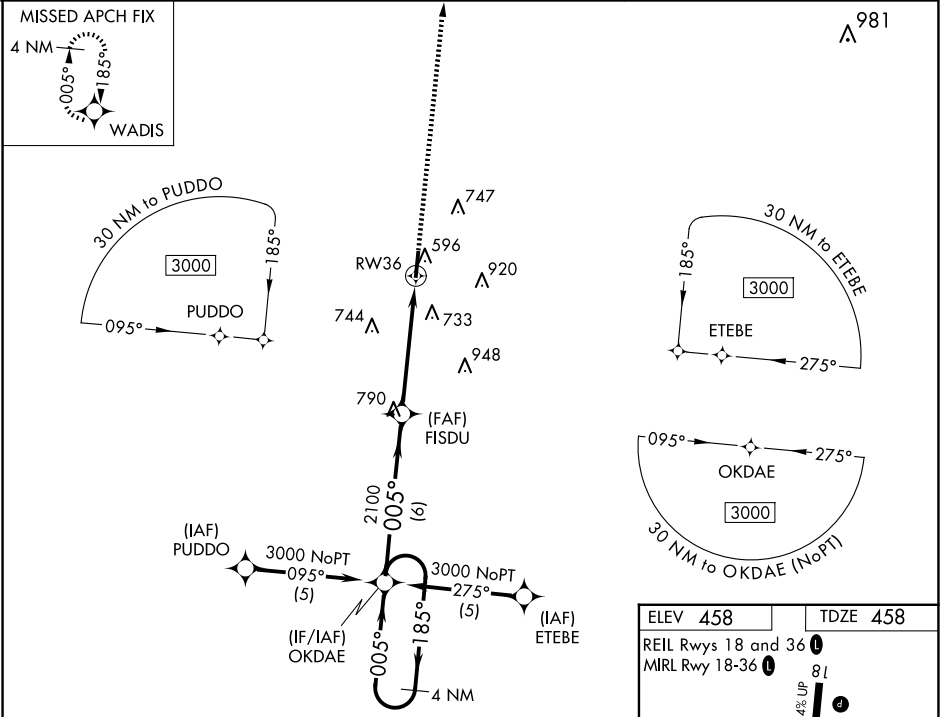

4 NM Holding Pattern	OKDAE	FISDU	RW36	WADIS
3000	185°	005°	005°	005°
GP 3.00°				
TCH 42				
	6 NM	3.3 NM	1.7 NM	
CATEGORY	A	B	C	D
LPV DA		838-1¼	380 (400-1¼)	
LNAV/VNAV DA		1107-2¼	649 (700-2¼)	
LNAV MDA	1040-1	582 (600-1)	1040-1½	582 (600-1¾)
CIRCLING	1060-1	602 (700-1)	1280-2½	822 (900-2½)