


WAAS CH 50308 W24A	APP CRS 241°	Rwy Ldg TDZE Apt Elev	5000 666 666
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 24
PONTIAC MUNI (PNT)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BMI altimeter setting. When local altimeter setting not received, use BMI altimeter setting: increase LPV DA to 1014 feet; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.	MISSED APPROACH: Climb to 3000 direct BUCLA and hold.
-----------------	--	---

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

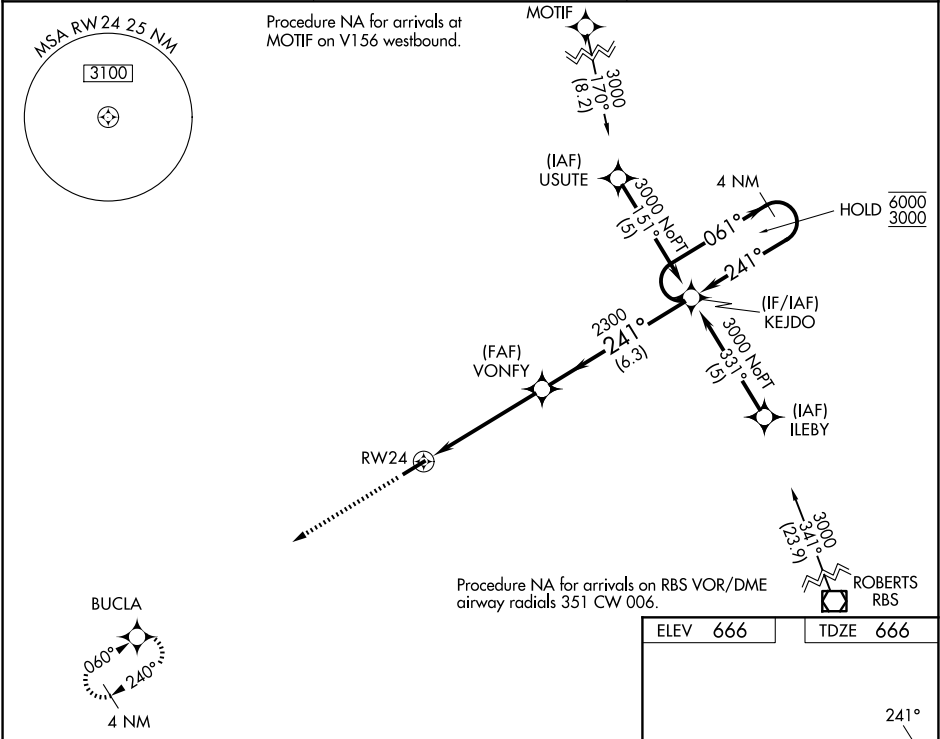

3000	BUCLA	VONFY	KEJDO	4 NM Holding Pattern
↑	✧	✧	✧	✧
1.6 NM to RW24	1.6 NM	3.3 NM	6.3 NM	
2300	241°	241°	061°	6000
			241°	3000
				GP 3.00° TCH 35
CATEGORY	A	B	C	D
LPV DA	916-1	250 (300-1)		NA
LNAV/VNAV DA	1139-1 3/8	473 (500-1 3/8)		NA
LNAV MDA	1220-1	554 (600-1)	1220-1 5/8	NA
			554 (600-1 3/8)	
CIRCLING	1220-1	554 (600-1)	1320-1 3/4	NA
			654 (700-1 3/4)	

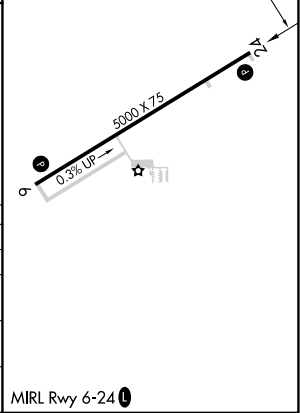

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025