

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>70512</b><br><b>W36A</b> | APP CRS<br><b>357°</b> | Rwy Idg <b>5500</b><br>TDZE <b>891</b><br>Apt Elev <b>910</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 36

ANKENY RGNL (IKV)


▼

▲

For uncompensated Baro-VNAV systems,  
LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F).  
Circling Rwy 22 NA at night. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 1500  
then climbing right turn to 4000 direct  
CINOR and hold, continue  
climb-in-hold to 4000.

|                          |                                           |                           |                               |
|--------------------------|-------------------------------------------|---------------------------|-------------------------------|
| AWOS-3<br><b>119.175</b> | DES MOINES APP CON<br><b>123.9 307.15</b> | CLNC DEL<br><b>126.65</b> | UNICOM<br><b>122.9 (CTAF)</b> |
|--------------------------|-------------------------------------------|---------------------------|-------------------------------|

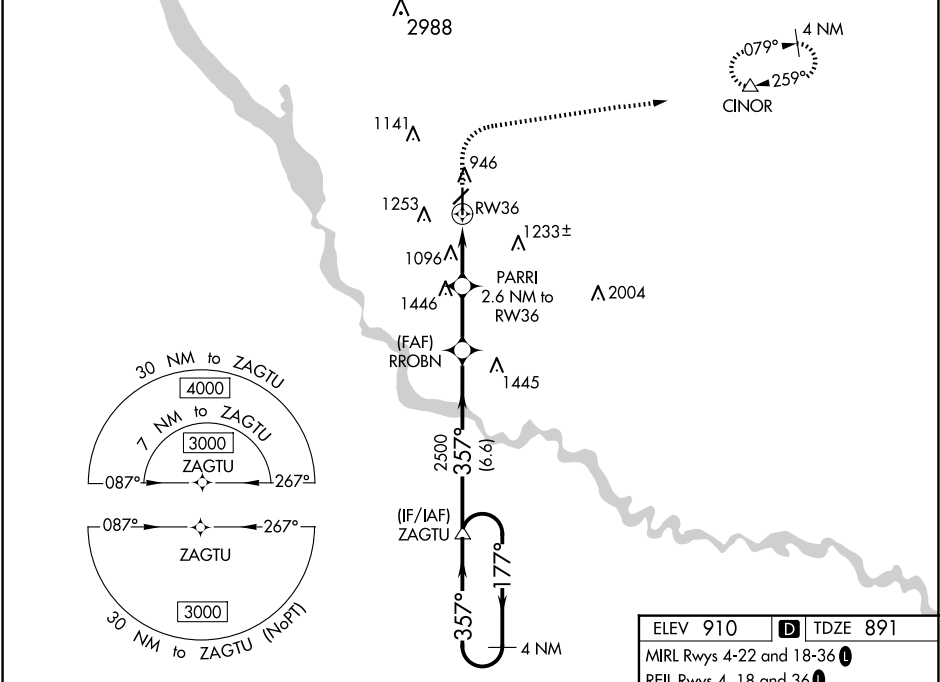

|           |          |         |             |              |  |                |  |                 |  |            |  |
|-----------|----------|---------|-------------|--------------|--|----------------|--|-----------------|--|------------|--|
|           |          | ZAGTU   |             | RROBN        |  | PARRI          |  | RW36            |  | CINOR      |  |
| 3000      |          | ←177°   |             | 357°→        |  | 357°           |  | *1760           |  | *LNAV only |  |
| GP 3.00°  |          | TCH 52  |             | 2500         |  | 2.6 NM to RW36 |  | *1.3 NM to RW36 |  | RW36       |  |
|           |          | ←6.6 NM |             | ←2.3 NM      |  | ←1.3 NM        |  | ←1.3 NM         |  |            |  |
| CATEGORY  |          | A       |             | B            |  | C              |  | D               |  |            |  |
| LPV       | DA       | 1091-3¼ |             | 200 (200-¾)  |  |                |  |                 |  |            |  |
| LNAV/VNAV | DA       | 1405-1¾ |             | 514 (500-1¾) |  |                |  |                 |  |            |  |
| LNAV      | MDA      | 1360-1  | 469 (500-1) | 1360-1¾      |  | 469 (500-1¾)   |  |                 |  |            |  |
|           | CIRCLING | 1560-1  | 650 (700-1) | 1560-1¾      |  | 1760-2¾        |  | 850 (900-2¾)    |  |            |  |

