

WAAS
CH **61142**
W01A

APP CRS
011°

Rwy Ldg **3992**
TDZE **89**
Apt Elev **92**

RNAV (GPS) RWY 1
NOATAK (WTK)(PAWN)

RNP APCH-GPS.

▼

▲

For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C. Circling Rwy 19 NA at night.


MISSED APPROACH: Climb to 1000 then climbing right turn to 3400 direct FITSU and hold.

AWOS-3P
135.75

ANCHORAGE CENTER
119.2 263.0

KOTZEBUE RADIO
122.4

UNICOM
122.8 (CTAF) 0

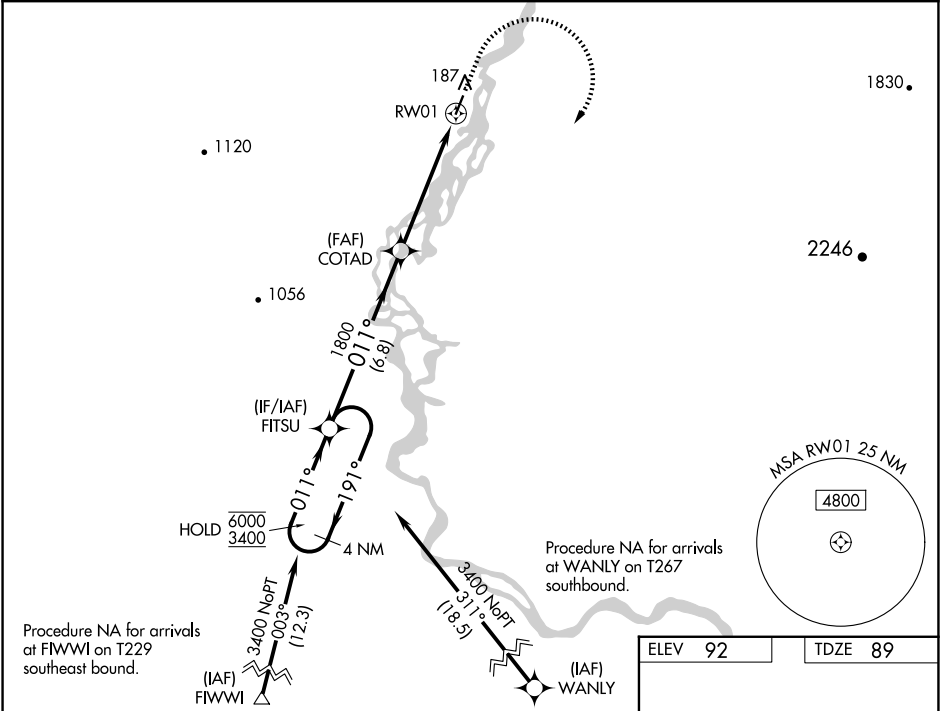

4 NM Holding Pattern				
FITSU				
COTAD				
RWY 1				
1000 3400 FITSU				
1.3 NM to RWY 1				
RWY 1				
6.8 NM 4 NM 1.3 NM				
CATEGORY	A	B	C	D
LPV DA	339-1 250 (300-1)			
LNAV/VNAV DA	339-1 250 (300-1)			
LNAV MDA	520-1	431 (500-1)	520-1¼	431 (500-1¼)
CIRCLING	520-1 428 (500-1)	560-1 468 (500-1)	560-1½ 468 (500-1½)	820-2¼ 728 (800-2¼)

