

VOR/DME WLK	APP CRS	Rwy Ldg
114.2	223°	3002
Chan 89		TDZE 17
		Apt Elev 17

VOR RWY 22


SELAWIK (WLK) (PASK)

⚠

Circling Rwy 4, 9, 27 NA at night. When local altimeter setting not received, use OTZ/PAOT altimeter setting and increase all MDAs 160 feet and S-22 visibility Cat C/D ½ SM. And GODBE fix minimums visibility Cat C/D ½ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct WLK VOR/DME and hold, continue climb-in-hold to 2500.

AWOS-3P 135.65	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 122.5	CTAF 122.7 0
--------------------------	--	--------------------------------	------------------------

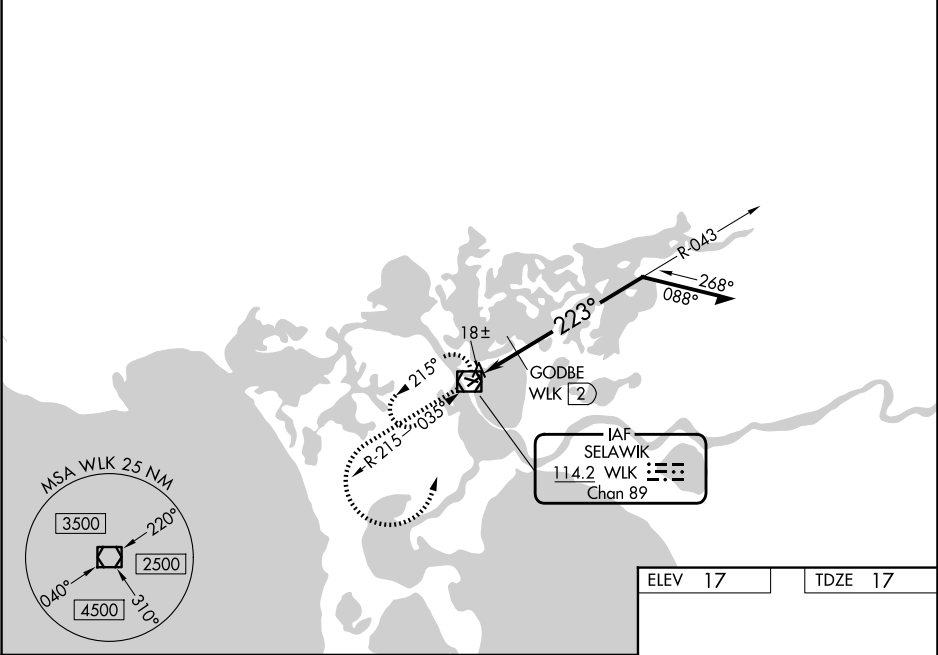

1000

2500

WLK

↑

↷

◻

WLK VOR/DME

2500

043°

GODBE WLK 2

≤ 2.91°

TCH 55

223°

1700

400

1.6 NM

Remain within 10 NM

↻

CATEGORY	A	B	C	D
S-22	400-1	383 (400-1)	400-1½	383 (400-1½)
CIRCLING	480-1 463 (500-1)	580-1 563 (600-1)	580-1½ 563 (600-1½)	580-2 563 (600-2)
GODBE FIX MINIMUMS				
S-22	380-1 363 (400-1)			
CIRCLING	480-1 463 (500-1)	580-1 563 (600-1)	580-1½ 563 (600-1½)	580-2 563 (600-2)

