

WAAS CH 90526 W21A	APP CRS 207°	Rwy Ldg TDZE Apt Elev	5003 537 537
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

OHIO COUNTY (JQD)

RNP APCH - GPS.


▼

▲

Baro-VNAV NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV DA to 858 feet, increase LNAV/VNAV DA to 1082 feet. Increase all MDA 80 feet, increase LNAV/VNAV visibilities all Cats ¼ SM, increase LNAV and Circling Cat C visibility ¼ SM. Rwy 21 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH:
Climb to 3000 direct VUSWO and on track 273° to CCT DME and hold.

AWOS-3PT 132.1	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

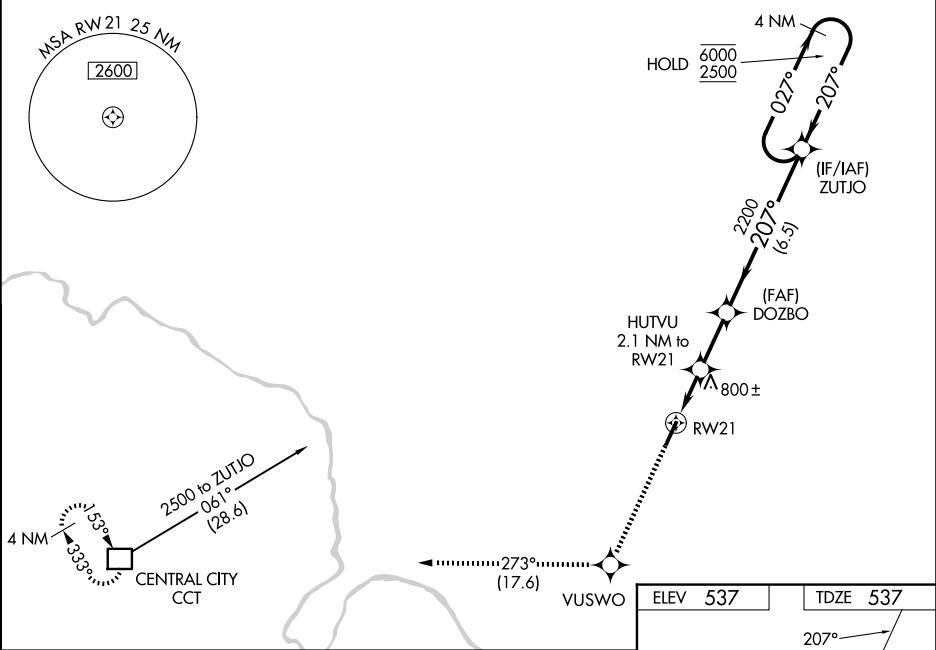

3000

VUSWO

CCT

↑

✱

tr 273°

*LNAV only.

HUTVU 2.1 NM to RWY21

DOZBO

RWY21

2.1 NM

2.3 NM

6.5 NM

2200

207°

027°

6000

2500


*1360

2200

GP 3.50°

TCH 47

CATEGORY	A	B	C	D
LPV DA	787-1	250 (300-1)	807-1 270 (300-1)	NA
LNAV/VNAV DA	1011-1⅜	474 (500-1⅝)		NA
LNAV MDA	1060-1	523 (600-1)	1060-1½ 523 (600-1½)	NA
CIRCLING	1060-1 523 (600-1)	1100-1 563 (600-1)	1300-2¼ 763 (800-2¼)	NA

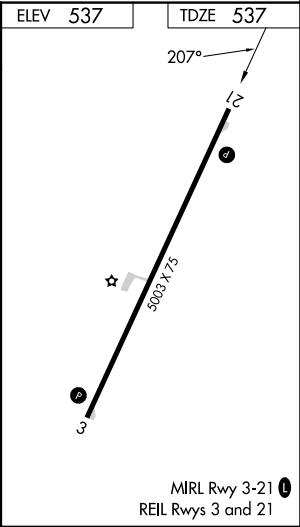

SE-1, 27 NOV 2025 to 26 DEC 2025

SE-1, 27 NOV 2025 to 26 DEC 2025