

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>77726</b><br><b>W02A</b> | APP CRS<br><b>019°</b> | Rwy Idg<br>TDZE <b>966</b><br>Apt Elev <b>972</b> | <b>4001</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 2

PAUL BRIDGES FLD (ØM3)


▽

NA

DME/DME RNP-0.3 NA. Use Lawrenceburg altimeter setting, when not received, use Muscle Shoals altimeter setting and increase all MDA 120 feet; increase LP and LNAV Cat C visibility ¾ SM and Circling Cat C visibility ½ SM. Procedure NA at night. Rwy 2, 20 helicopter visibility reduction NA.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct QUGEG and hold.

|                              |                                        |                                 |
|------------------------------|----------------------------------------|---------------------------------|
| 2M2 AWOS-3<br><b>120.175</b> | MEMPHIS CENTER<br><b>125.85 379.25</b> | UNICOM<br><b>122.8 (CTAF) Ø</b> |
|------------------------------|----------------------------------------|---------------------------------|

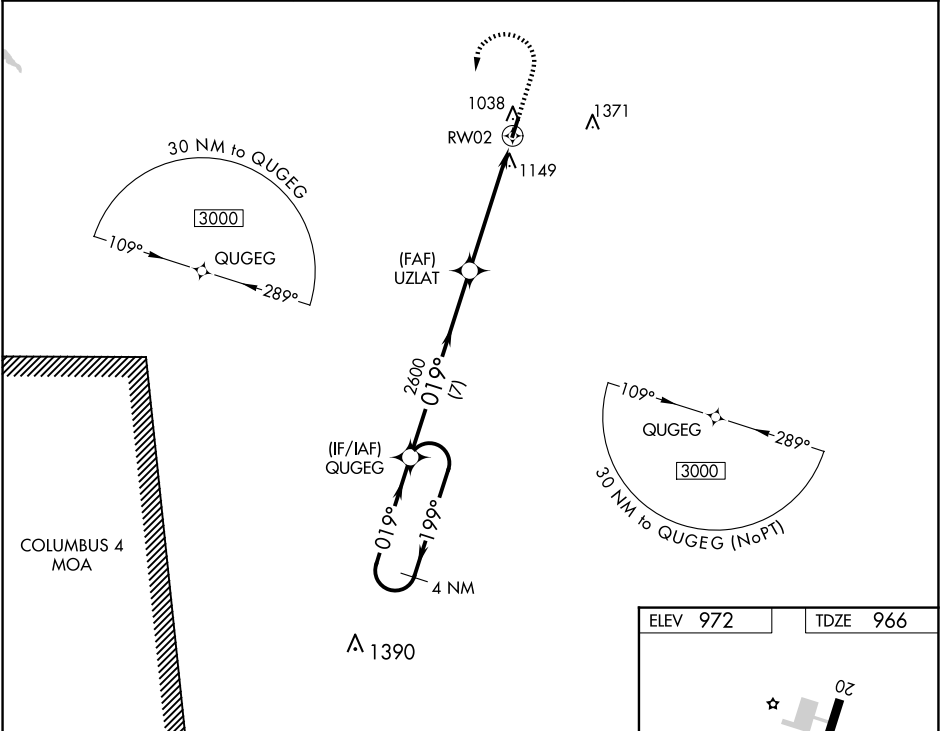

|                      |        |             |                         |        |       |
|----------------------|--------|-------------|-------------------------|--------|-------|
| 4 NM Holding Pattern |        | QUGEG       | 2000                    | 3000   | QUGEG |
| 3000                 |        | 199°        | 019°                    | 019°   | UZLAT |
| 7 NM                 |        | 2600        | 3.00°                   | TCH 40 | RW02  |
| CATEGORY             | A      | B           | C                       | D      |       |
| LP MDA               | 1520-1 | 554 (600-1) | 1520-1½<br>554 (600-1½) | NA     |       |
| LNAV MDA             | 1520-1 | 554 (600-1) | 1520-1½<br>554 (600-1½) | NA     |       |
| CIRCLING             | 1580-1 | 608 (700-1) | 1740-2¼<br>768 (800-2¼) | NA     |       |

