

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>63022</b><br><b>W06A</b> | APP CRS<br><b>067°</b> | Rwy Ldg<br>TDZE <b>665</b><br>Apt Elev <b>665</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 6



SANDUSKY COUNTY RGNL (S24)

RNP APCH - GPS.

**⚠** Baro-VNAV and VDP NA when using TOL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use TOL altimeter setting: increase LPV DA to 1008 feet and all visibilities  $\frac{3}{8}$  SM; increase LNAV/VNAV DA to 1041 feet and all visibilities  $\frac{3}{8}$  SM; increase all MDA 100 feet and LNAV visibility Cat C and D  $\frac{3}{8}$  SM and Circling visibility Cat C and D  $\frac{1}{2}$  SM.

MISSED APPROACH:  
Climb to 3000 direct  
OBOZE and hold.

|                           |                                      |                                  |
|---------------------------|--------------------------------------|----------------------------------|
| AWOS-3P<br><b>119.575</b> | TOLEDO APP CON<br><b>126.1 307.0</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|---------------------------|--------------------------------------|----------------------------------|

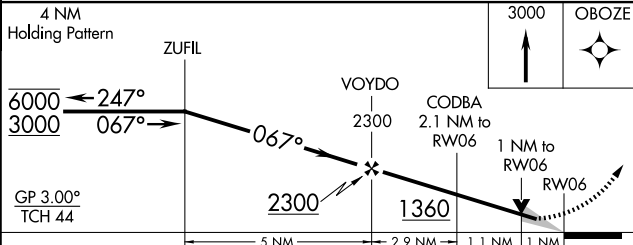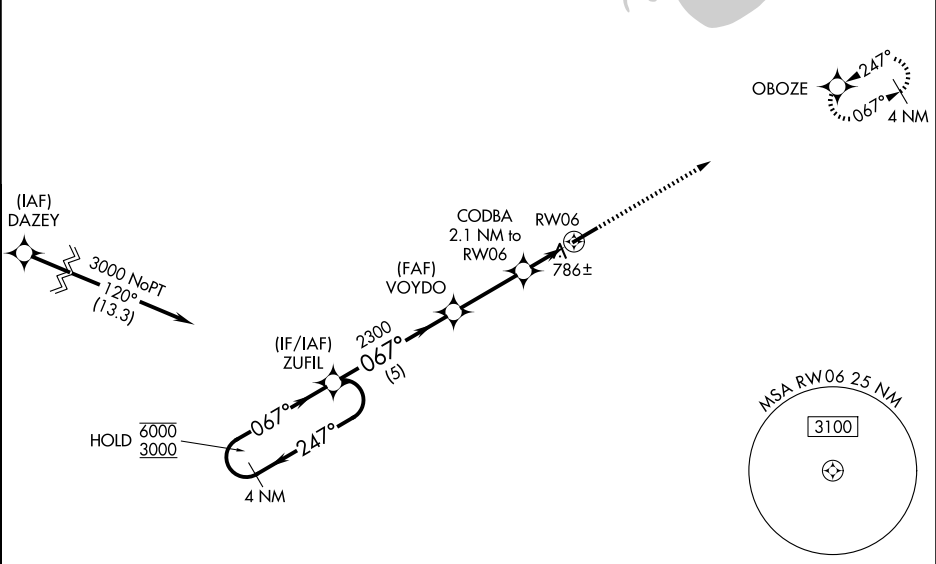

| CATEGORY     | A                     | B                     | C                         | D                                                  |
|--------------|-----------------------|-----------------------|---------------------------|----------------------------------------------------|
| LPV DA       |                       | 915- $\frac{3}{4}$    | 250 (300- $\frac{3}{4}$ ) |                                                    |
| LNAV/VNAV DA |                       | 948- $\frac{7}{8}$    | 283 (300- $\frac{7}{8}$ ) |                                                    |
| LNAV MDA     |                       | 1040-1                | 375 (400-1)               |                                                    |
| CIRCLING     | 1120-1<br>455 (500-1) | 1160-1<br>495 (500-1) | 1380-2<br>715 (800-2)     | 1380-2 $\frac{1}{4}$<br>715 (800-2 $\frac{1}{4}$ ) |

