



WAAS CH 97537 W25A	APP CRS 248°	Rwy Ldg TDZE 661 Apt Elev 661
--	------------------------	---

RNAV (GPS) RWY 25
PIKE COUNTY (EOP)

RNP APCH - GPS	MISSED APPROACH: Climb to 1120 then climbing left turn to 3000 direct IGMYY and hold.
Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 7 NA at night. When local altimeter setting not received, use PMH altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and LP visibility Cat C/D ½ SM, and Circling visibility Cat A/B/C ¼ SM. VDP NA when using PMH altimeter setting.	

AWOS-3PT 121.45	INDIANAPOLIS CENTER 135.575 290.5	UNICOM 123.0 (CTAF)
---------------------------	---	-------------------------------

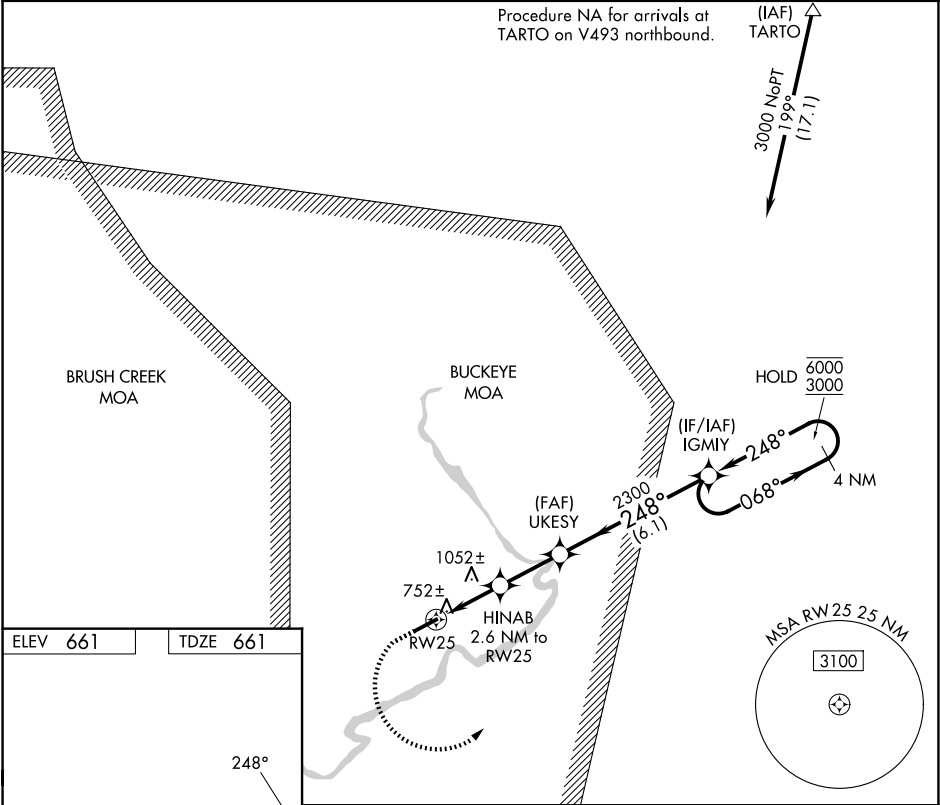

1120	3000	IGMYY	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).	4 NM Holding Pattern
HINAB 2.6 NM to RW25				
RW25 1.1 NM to RW25				
UKESY 2300				
1520 TCH 40				
1.1 NM 1.6 NM 2.4 NM 6.1 NM				
CATEGORY	A	B	C	D
LP MDA	1020-1 359 (400-1)			
LNAV MDA	1280-1	619 (700-1)	1280-1¾	619 (700-1¾)
CIRCLING	1440-1 779 (800-1)	1460-1 799 (800-1)	1500-2½ 839 (900-2½)	1640-3 979 (1000-3)