

WAAS CH 99630 W09A	APP CRS 100°	Rwy Idg 3700 TDZE 1777 Apt Elev 1779
--	------------------------	---


RNAV (GPS) RWY 9
LINTON MUNI (7L2)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use BIS altimeter setting and increase LPV DA to 2134 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2198 and all visibilities ¼ SM. Increase all MDAs 120 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM. Baro-VNAV and VDP NA when using BIS altimeter setting.

MISSED APPROACH: Climb to 4700 direct JUTIL and on track 018° to WISEK and hold.

ASOS-3 118.175	MINNEAPOLIS CENTER 135.25 256.7	CTAF 122.90
--------------------------	---	-----------------------

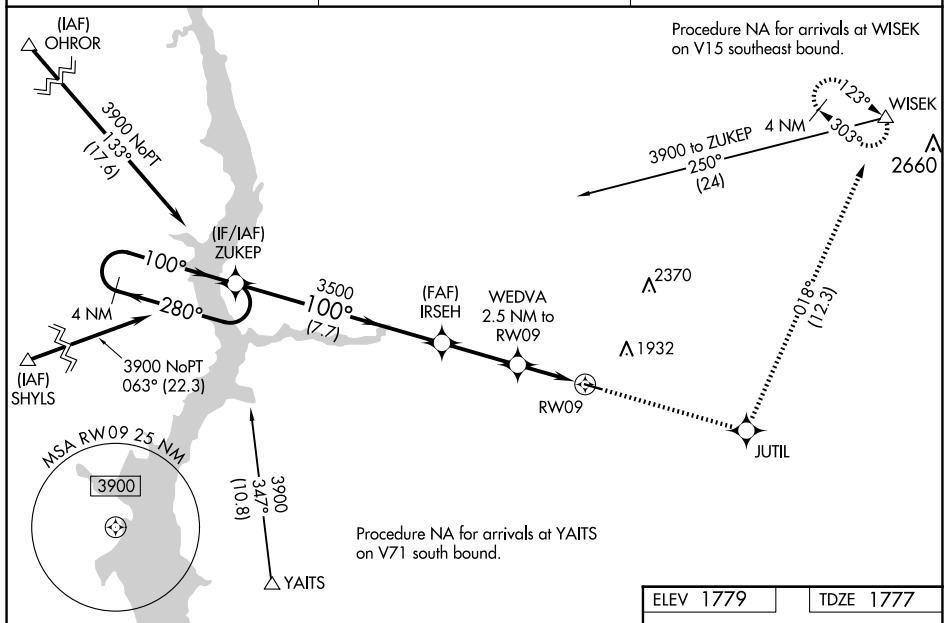

ELEV 1779	TDZE 1777
-----------	-----------

