

WAAS CH 60948 W20A	APP CRS 201°	Rwy Idg 4000 TDZE 75 Apt Elev 75
--	------------------------	---

RNAV (GPS) RWY 20

HOLY CROSS (HCA)(PAHC)

RNP APCH - GPS.

 Circling NA west of Rwy 2-20. Rwy 20 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Anvik altimeter setting and increase all MDAs 120 feet, LNAV all visibilities 1/2 SM, LP visibilities Cats C and D 3/4 SM, and Circling visibilities Cats B, C, and D 1/2 SM. Straight-in and Circling Rwy 20 NA at night.

MISSED APPROACH: Climbing left turn to 2700 direct GODHY and on track 351° to NUANC and hold.

AWOS-3P 118.325	ANCHORAGE CENTER 118.15 251.05	KENAI RADIO 122.45	CTAF 122.8 0
---------------------------	--	------------------------------	------------------------

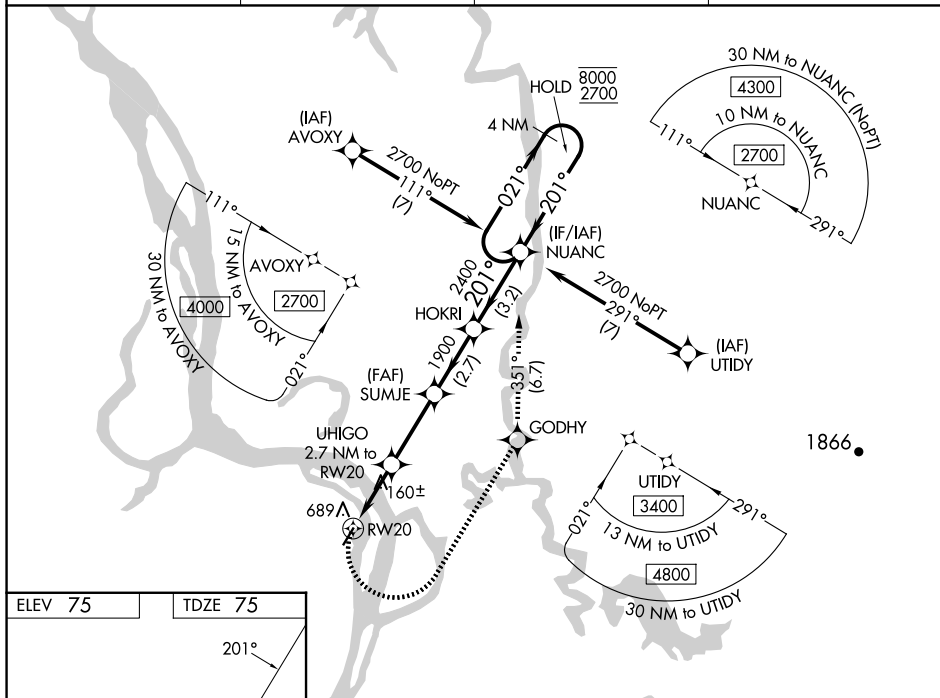


Diagram illustrating the RW20 approach procedure, showing the runway (4000 x 100), the approach path, and the associated altitudes and distances.

CATEGORY	A	B	C	D
LP MDA	420-1 345 (400-1)			
LNAV MDA	940-1 865 (900-1)	940-1¼ 865 (900-1¼)	940-2½ 865 (900-2½)	
CIRCLING	940-1¼ 865 (900-1¼)		940-2½ 865 (900-2½)	940-2¾ 865 (900-2¾)

MIRL Rwy 2-20