

NEPHI, UTAH

AL-9496 (FAA)

25331

WAAS CH 63221 W17A	APP CRS 168°	Rwy Ldg 6300 TDZE 5005 Apt Elev 5022
--	------------------------	---

RNAV (GPS) RWY 17


NEPHI MUNI (U14)

RNP APCH - GPS.

T Baro-VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. When local altimeter setting not received, use PVU altimeter setting: increase LPV DA to 5577 feet and visibility ½ SM; increase LNAV/VNAV DA to 5836 feet and visibility ½ SM; increase all MDAs 160 feet and LNAV and Circling Cats A/B visibilities ½ SM. VDP NA when using PVU altimeter setting.

MISSED APPROACH:
Climb to 11 400 direct
ACAGO and on track
191° to PILTE and hold.

AWOS-3PT 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
----------------------------	--	-----------------------------------

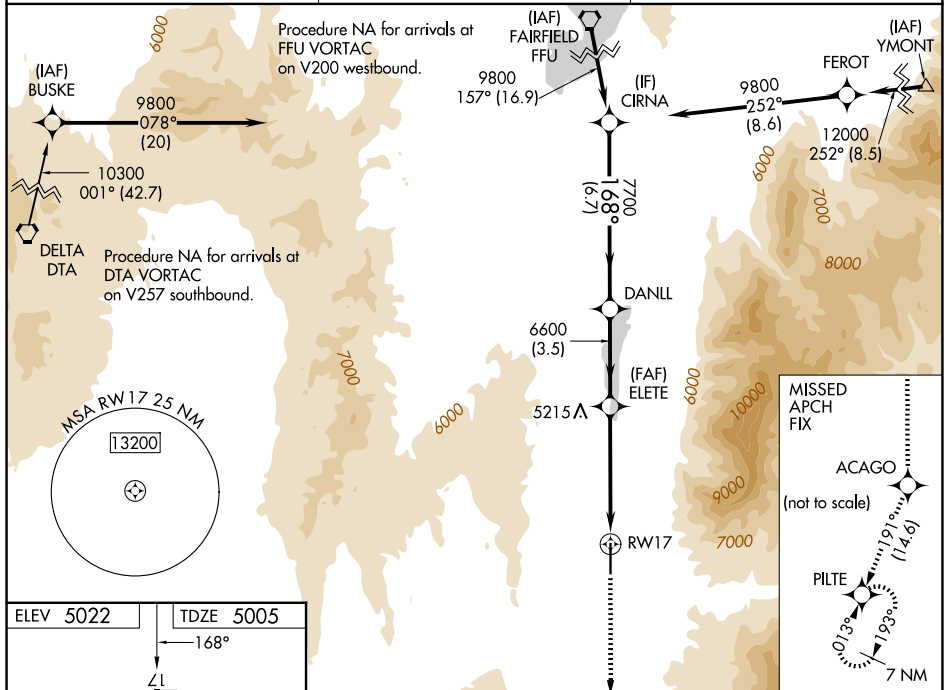

ELEV 5022

TDZE 5005

168°

Z L

400

100 X 000

P

35

MRL Rwy 17-35

REIL Rwy 17 and 35

11400 ↑	ACAGO ✧	tr 191°	PILTE ✧	Diagram labels: 11400, ACAGO, PILTE, tr 191°, ELETE, DANLL, CIRNA, 9800, 168°, 7700, 6600, 2.4 NM to RW17, 2.4 NM, 2.5 NM, 3.5 NM, 6.7 NM, GP 3.00°, TCH 40.				
CATEGORY		A		B		C		D
LPV	DA	5433-1½			428 (500-1½)			
LNAV/ VNAV	DA	5692-2½			687 (700-2½)			
LNAV MDA	5800-1 795 (800-1)	5800-1¼ 795 (800-1¼)	5800-2½			795 (800-2½)		
CIRCLING	5800-1 778 (800-1)	5800-1¼ 778 (800-1¼)	NA					

NEPHI, UTAH

Orig-D 27NOV25

39°44'N-111°52'W

NEPHI MUNI (U14)

RNAV (GPS) RWY 17

SW-4, 27 NOV 2025 to 25 DEC 2025