


WAAS CH 45814 W16A	APP CRS 165°	Rwy Idg TDZE 3086 Apt Elev 3086
--	------------------------	---

RNAV (GPS) RWY 16

RONAN (7S~~0~~)

RNP APCH.	NA Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting: increase LPV DA to 3550 and LNAV/VNAV DA to 3639 and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV Cat B and Circling Cats A and B visibility ¼ SM.	MISSED APPROACH: Climb to 13000 direct IBBOR and on track 255° to HANIM and hold, continue climb-in-hold to 13000.
-----------	---	---

AWOS-3 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) 0
--------------------------	---	----------------------------------

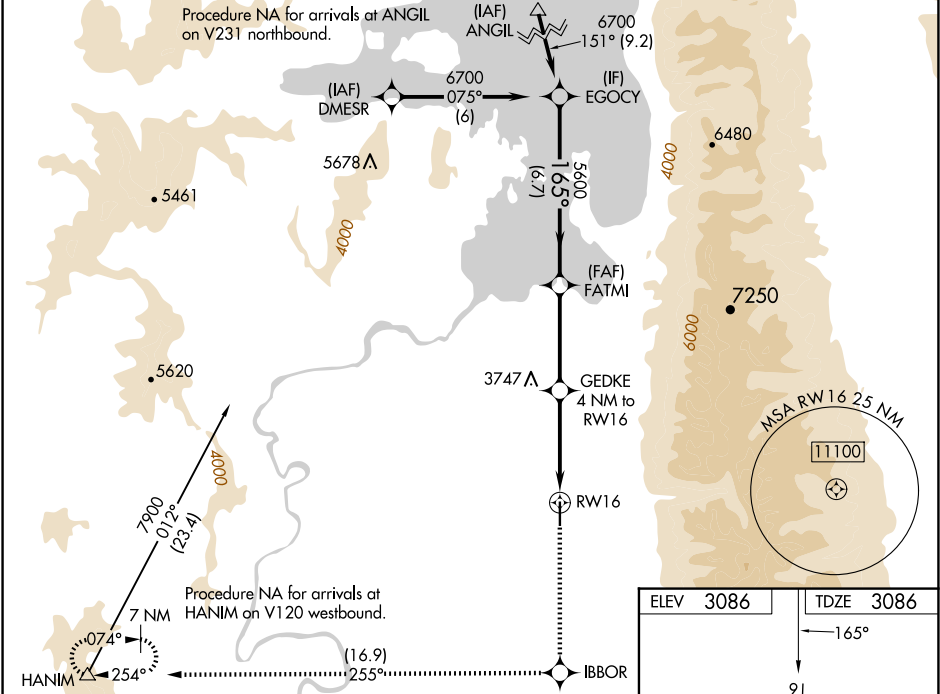

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).				
EGOCY FATMI GEDKE 4 NM to RW16 HANIM 6700 5600 *4400 RW16 GP 3.00° TCH 40 165° 13000 IBBOR tr 255° *LNAV only 6.7 NM 3.8 NM 4 NM				
CATEGORY	A	B	C	D
LPV DA	3443-1¼	357 (400-1¼)	NA	
LNAV/VNAV DA	3532-1⅜	446 (500-1⅜)	NA	
LNAV MDA	3800-1	714 (800-1)	NA	
CIRCLING	3800-1	714 (800-1)	NA	

