

WAAS CH 90116 W01A	APP CRS 013°	Rwy Ldg TDZE Apt Elev	6000 467 488
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1



BEECH RIVER RGNL (PVE)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5° F) or above 54°C (130°F). DME/DMÉ RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 807 and all Cats visibility ¾ mile; increase LNAV/VNAV all Cats DA to 911 and all Cats visibility ¾ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ½ mile and Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct EYODI and hold.

AWOS-3 118.125	MEMPHIS CENTER 125.85 379.25	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

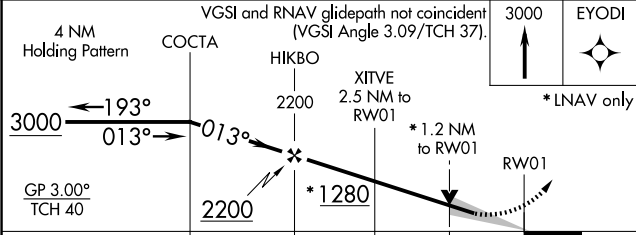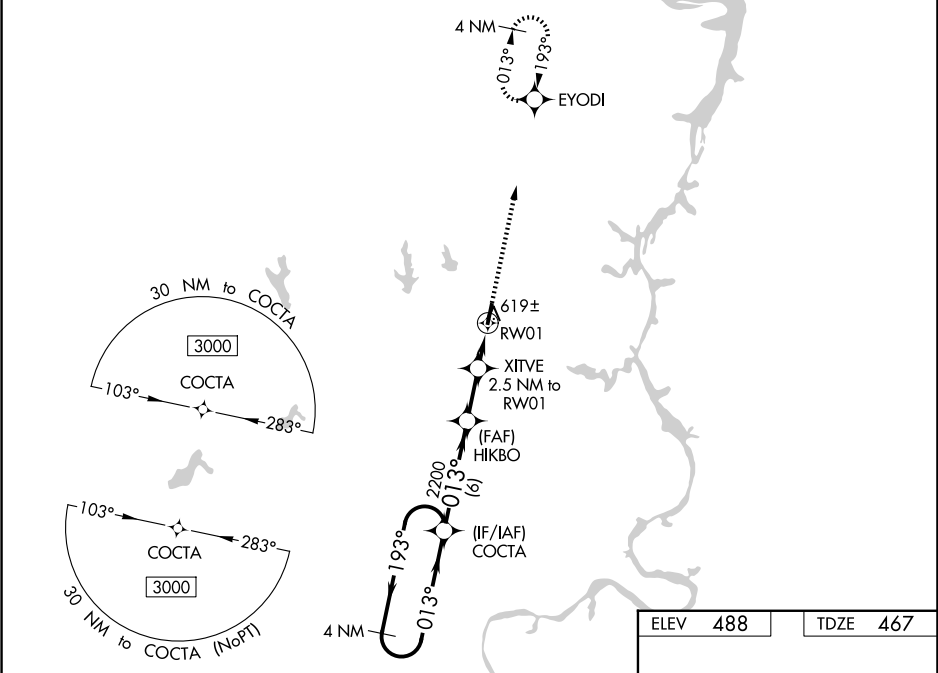

CATEGORY	A	B	C	D
LPV DA	717-7⁄8		250 (300-7⁄8)	
LNAV/VNAV DA	821-1¼		354 (400-1¼)	
LNAV MDA	880-1	413 (400-1)	880-1⅛	413 (400-1⅛)
CIRCLING	940-1 452 (500-1)	980-1 492 (500-1)	1000-1½ 512 (600-1½)	1200-2¼ 712 (800-2¼)

