

WAAS CH 97316 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	6000 488 488
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 19

BEECH RIVER RGNL (PVE)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5 °F) or above 54 °C (130°F).
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 828 and all Cats visibility ¼ mile; increase LNAV/VNAV all Cats DA to 890 and all Cats visibility ⅓ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile and Circling Cat D visibility ½ mile. VDP and Baro-VNAV NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
COCTA and hold.

AWOS-3 118.125	MEMPHIS CENTER 125.85 379.25	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

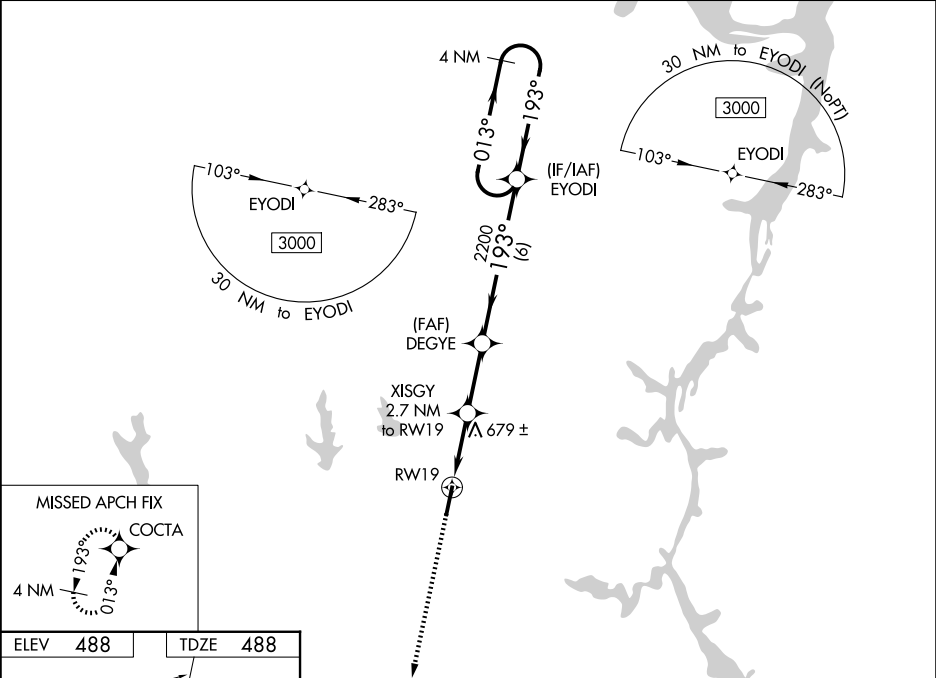

ELEV 488	TDZE 488
-----------------	-----------------

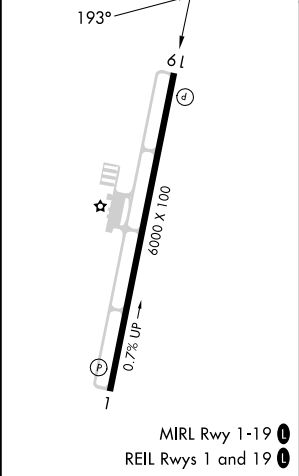

3000 COCTA		VGSi and RNAV glidepath not coincident (VGSi Angle 3.29/TCH 30).		4 NM Holding Pattern	
*LNAV only		XISGY 2.7 NM to RW19		DEGYE 2200	
RW19		*1.2 NM to RW19		*1380	
1.2 NM		1.5 NM		2.6 NM	
CATEGORY		A		B	
LPV DA		738-7/8		250 (300-7/8)	
LNAV/VNAV DA		800-1		312 (400-1)	
LNAV MDA		940-1		452 (500-1)	
CIRCLING		940-1		452 (500-1)	
		980-1		1000-1 1/2	
		492 (500-1)		512 (600-1 1/2)	
				1200-2 1/4	
				712 (800-2 1/4)	