

APP CRS
168°

Rwy Ldg
TDZE
Apt Elev

6004
364
364

RNAV (GPS) RWY 17
MOUNT PLEASANT RGNL (OSA)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ¼ mile all Cats, LNAV visibilities ½ mile all Cats, and circling visibilities ½ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2100 direct JAVOT and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 317.75	UNICOM 122.7 (CTAF) 0
-------------------	-------------------------------------	--------------------------

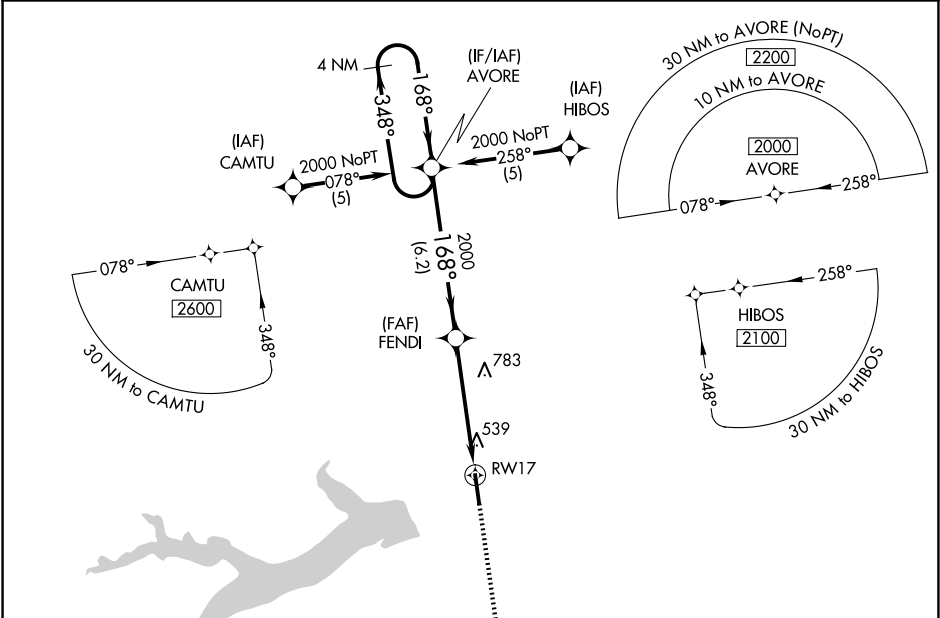

MISSED APCH FIX
JAVOT

4 NM Holding Pattern

AVORE FENDI

2100 JAVOT

GP 3.00° TCH 39

2000 168° 348°

2000 168°

2.2 NM to RW17

RW17

6.2 NM 2.8 NM 2.2

CATEGORY A B C D

LNAV/VNAV DA 890-2 526 (600-2)

LNAV MDA 1100-1 736 (800-1) 1100-2 736 (800-2) 1100-2¼ 736 (800-2¼)

CIRCLING 1100-1 736 (800-1) 1100-2 736 (800-2) 1100-2¼ 736 (800-2¼)

ELEV 364 TDZE 364

168°

6004 X 100

0.4% Up

35

REIL Rwy 17 and 35 0

MIRL Rwy 17-35 0