

WAAS CH 42628 W07A	APP CRS 074°	Rwy Idg TDZE Apt Elev	5000 1112 1122
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

BELLEFONTAINE RGNL (ED.J)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting: increase LPV DA to 1456 feet, LNAV/VNAV DA to 1598 feet, and all MDAs 100 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ⅓ SM, and Circling Cat C visibility ½ SM and Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 1600 then climbing left turn to 3000 direct BUTYN and hold.

AWOS-3 118.075	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

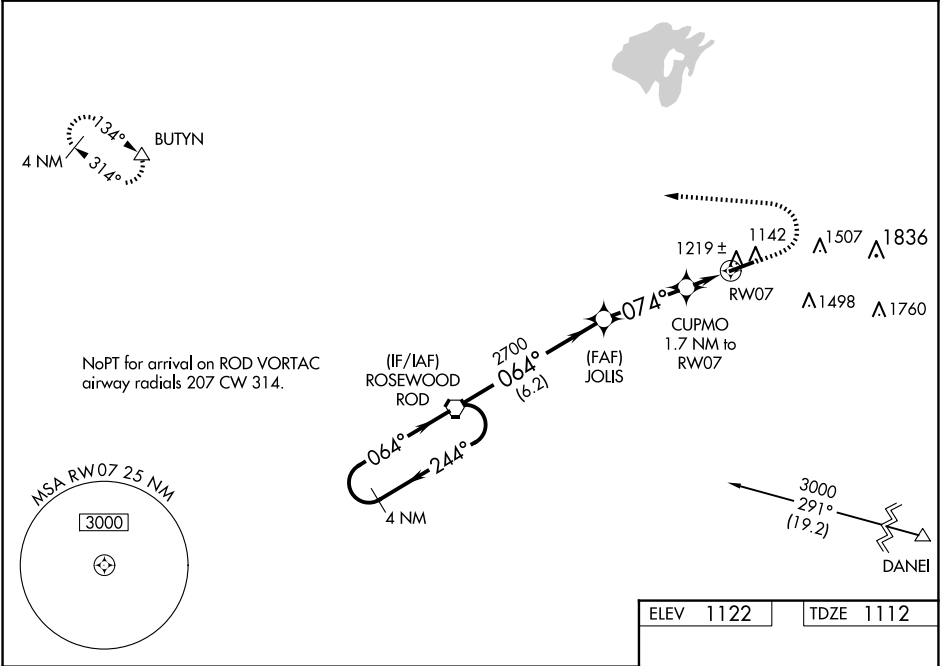

4 NM Holding Pattern

ROD VORTAC

JOLIS

2700

CUPMO 1.7 NM to RW07

* LNAV only.

GP 3.00° TCH 41

3000 ← 244° → 064° → 064° → 2700 → 074° → RW07

* 1.1 NM to RW07

* 1680

6.2 NM 3.2 NM 0.7 NM 1.1 NM

CATEGORY	A	B	C	D
LPV DA		1362-⅞	250 (300-⅞)	
LNAV/VNAV DA		1504-1⅓	392 (400-1⅓)	
LNAV MDA		1480-1	368 (400-1)	
CIRCLING	1620-1 498 (500-1)	1640-1 518 (600-1)	1860-2 738 (800-2)	1980-2¾ 858 (900-2¾)

ELEV 1122 TDZE 1112

1600 3000 BUTYN

△

* LNAV only.

CUPMO 1.7 NM to RW07

* 1.1 NM to RW07

RW07

5000 X 100

0.4% UP

1178

074°

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025