

WAAS CH 72914 W01A	APP CRS 008°	Rwy Ldg 3700 TDZE 1774 Apt Elev 1774
--	------------------------	---

RNAV (GPS) RWY 1


ANTELOPE COUNTY (4V9)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using BVN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Circling to Rwy 13, 31 NA at night. When local altimeter setting not received, use BVN altimeter setting and increase LPV DA to 2032 feet; increase LNAV/VNAV DA to 2227 feet and all visibilities ¼ SM. Increase all MDAs 60 feet.

MISSED APPROACH: Climb to 4400 direct MODPY and hold, continue climb-in-hold to 4400.

AWOS-3PT 119.275	MINNEAPOLIS CENTER 128.0 257.95	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

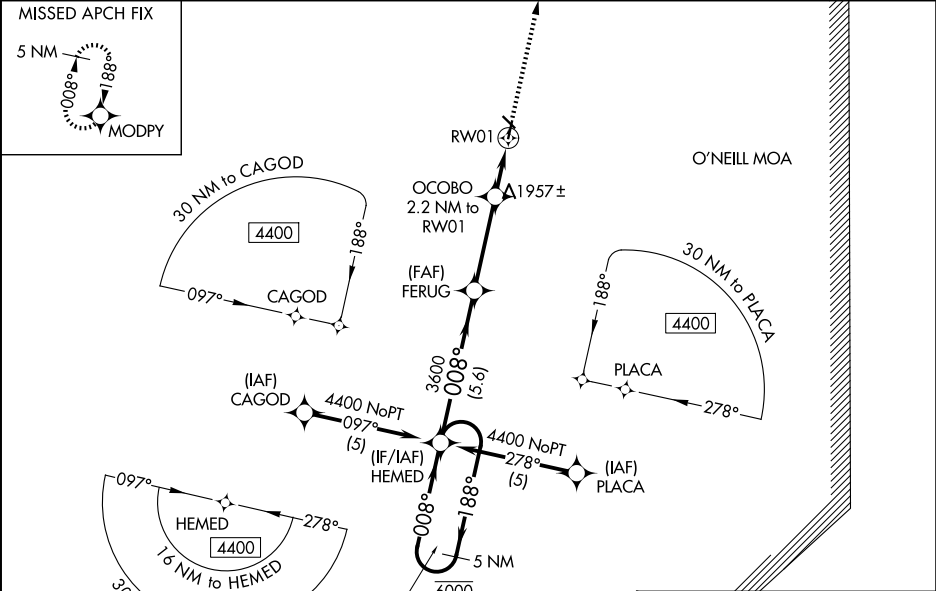

ELEV 1774 **D** TDZE 1774

MIRL Rwys 1-19 and 13-31 **0**

5 NM Holding Pattern

HEMED

FERUG

OCOBO 2.2 NM to RW01

MODPY

6000

4400

008°

188°

008°

3600

2500

1.3 NM to RW01

RW01

5.6 NM

3.5 NM

0.9

1.3 NM

GP 3.00°

TCH 41

CATEGORY	A	B	C	D
LPV DA	1974-¾	200 (200-¾)		NA
LNAV/VNAV DA	2169-1⅛	395 (400-1⅛)		NA
LNAV MDA	2220-1	446 (500-1)		NA
CIRCLING	2260-1 486 (500-1)	2380-1 606 (700-1)		NA

13

61

3310 X 60

09 X 200

008°