



WAAS CH 82047 W31A	APP CRS 311°	Rwy Ldg TDZE Apt Elev	3798 3505 3505
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31


EKALAKA (97M)

RNP APCH - GPS.	Baro-VNAV NA. Rwy 31 helicopter visibility reduction below ¾ SM NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3960 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 4460 feet; increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM.	MISSED APPROACH: Climb to 7000 direct ELTRO and hold, continue climb-in-hold to 7000.
-----------------	---	---

BHK ASOS 135.475	SALT LAKE CENTER 126.85 305.2	CTAF 122.9 0
----------------------------	---	------------------------

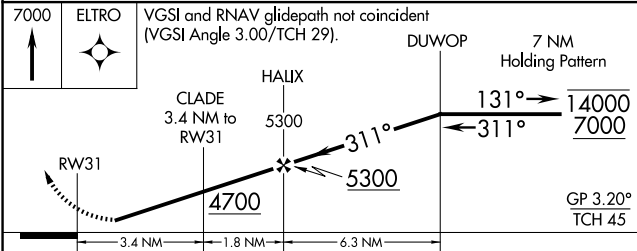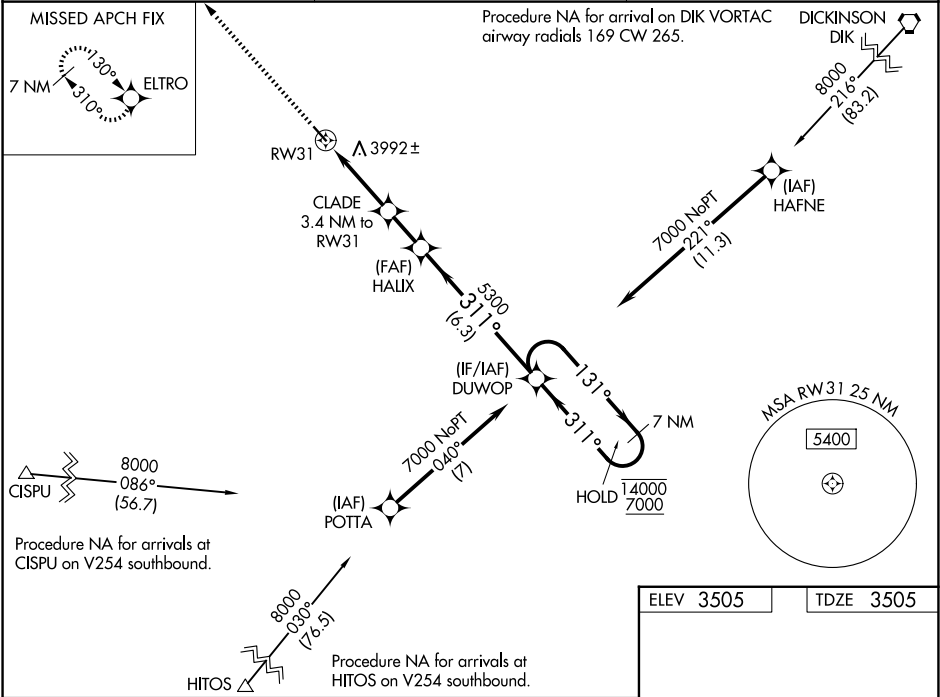

CATEGORY	A	B	C	D
LPV DA	3900-1 1/8	395 (400-1 1/8)		
LNAV/VNAV DA	4400-2 1/2	895 (900-2 1/2)		
LNAV MDA	4400-1 1/4 895 (900-1 1/4)	4400-1 1/2 895 (900-1 1/2)	4400-3 895 (900-3)	

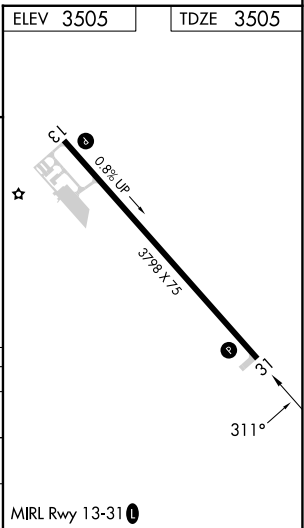

NW-1, 27 NOV 2025 to 25 DEC 2025

NW-1, 27 NOV 2025 to 25 DEC 2025