

WAAS CH 53532 W36A	APP CRS 002°	Rwy Idg 5003 TDZE 235 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 36
DELTA RGNL (DRP)

RNP APCH - GPS.






T Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter
setting not received, use West Memphis altimeter setting: increase LPV DA to 503 feet and
all visibilities ½ SM; increase LNAV/VNAV DA to 755 feet; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct UHIH and hold, continue climb-in-hold to 3000.

AWOS-3P
120.0

MEMPHIS CENTER
135.3 335.8

UNICOM
123.0 (CTAF) **L**

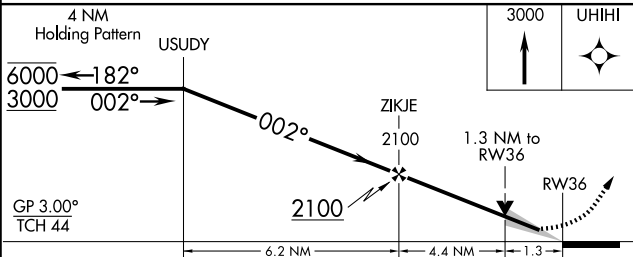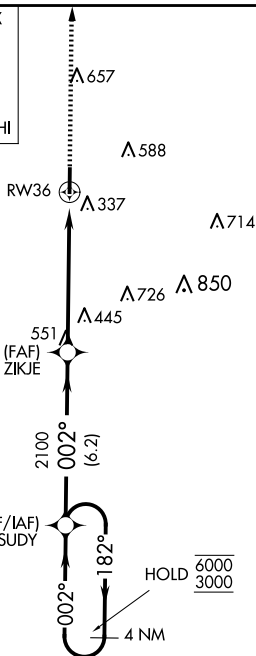

CATEGORY	A	B	C	D
LPV DA	435-3 ₄	200 (200-3 ₄)	NA	
LNAV/VNAV DA	687-1 ₈	452 (500-1 ₈)	NA	
LNAV MDA	700-1	465 (500-1)	NA	
 CIRCLING	760-1	521 (600-1)	NA	

ELEV 239		TDZE 235
----------	--	----------

HIRL Rwy 18-36 **L**
REIL Rwy 18 & 36 **L**

