



APP CRS	Rwy Ldg	3416
125°	TDZE	1924
	Apt Elev	1924

RNAV (GPS) RWY 12

NEW TOWN MUNI (Ø5D)

RNP APCH.	MISSED APPROACH: Climb to 4500 direct SUSUE and hold.
▼ ▲ NA	Use Stanley altimeter setting, when not received, use Tioga altimeter setting and increase all MDAs 40 feet. Increase Cat C visibilities ¼ SM. Rwy 12 helicopter visibility reduction below ¾ SM NA.

MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9 0
-----------------------------------	-----------------

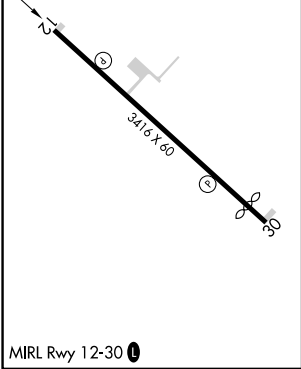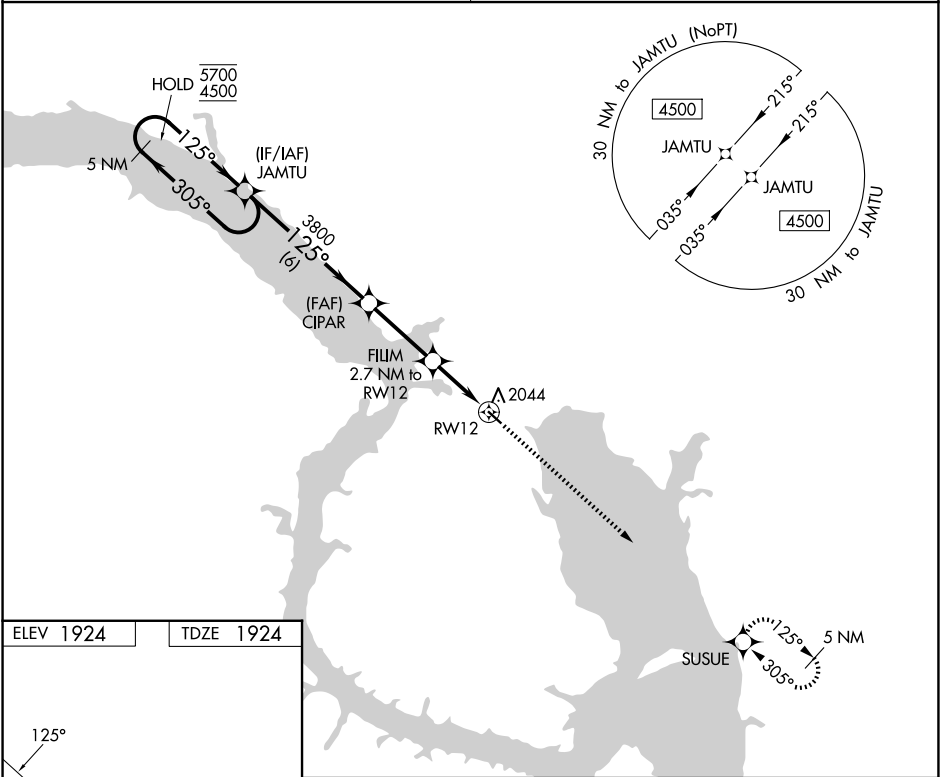

5 NM Holding Pattern 5700 ← 305° 4500 → 125°				JAMTU	CIPAR	FILM 2.7 NM to RW12	4500 ↑	SUSUE ✦
				125°	3.00° TCH 40	2800		
				3800				
				6 NM	3.1 NM	2.7 NM		
CATEGORY	A		B		C		D	
LNAV MDA	2440-1 516 (600-1)				2440-1 ³ / ₈ 516 (600-1 ³ / ₈)		NA	
CIRCLING	2520-1 596 (600-1)		2620-1 696 (700-1)		2780-2 ¹ / ₂ 856 (900-2 ¹ / ₂)		NA	

NC-1, 27 NOV 2025 to 25 DEC 2025

NC-1, 27 NOV 2025 to 25 DEC 2025