

WAAS CH 93742 W35A	APP CRS 353°	Rwy Ldg 5500 TDZE 1409 Apt Elev 1409
--	------------------------	---

RNAV (GPS) RWY 35
SIOUX COUNTY RGNL (SXX)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting: increase LPV DA to 1668 feet; increase LNAV/VNAV DA to 1718 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM. For inop ALS, increase LNAV/VNAV all Cts visibility to ½ SM, and LNAV Cat C/D visibility to ¾ SM. For inop ALS when using LRJ altimeter setting, increase LNAV/VNAV all Cts visibility to ¾ SM, and LNAV Cat C/D visibility to 1 SM.

MALSR







MISSED APPROACH: Climb to 4500 direct HALGA and hold, continue climb-in-hold to 4500.

AWOS-3P
120.075

SIOUX CITY APP CON ★
 124.6 307.0

UNICOM
122.7 (CTAF)

MISSED APCH FIX

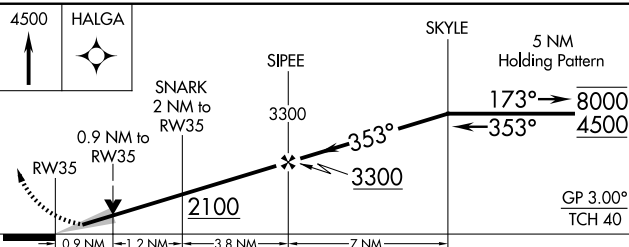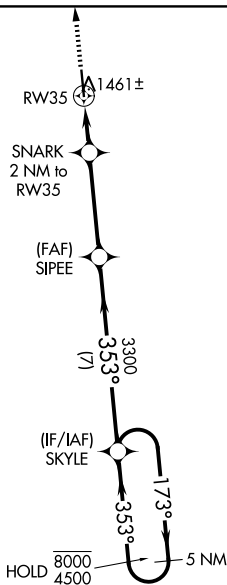

CATEGORY	A	B	C	D
LPV DA	1609-½ 200 (200-½)			
LNAV/ VNAV DA	1659-½ 250 (300-½)			
LNAV MDA	1720-½ 311 (400-½)			
CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)

ELEV 1409		TDZE 1409
-----------	--	-----------

